

Data-Over-Cable Service Interface Specifications

eDOCSIS[™] Specification

CM-SP-eDOCSIS-I12-070518

ISSUED

Notice

This specification is a cooperative effort undertaken at the direction of Cable Television Laboratories, Inc. (CableLabs[®]) for the benefit of the cable industry. Neither CableLabs, nor any other entity participating in the creation of this document, is responsible for any liability of any nature whatsoever resulting from or arising out of use or reliance upon this document by any party. This document is furnished on an AS-IS basis and neither CableLabs, nor other participating entity, provides any representation or warranty, express or implied, regarding its accuracy, completeness, or fitness for a particular purpose.

© Copyright 2003-2007 Cable Television Laboratories, Inc.
All rights reserved.

Document Status Sheet

Document Control Number:	CM-SP-eDOCSIS-I12-070518			
Document Title:	eDOCSIS™ Specification			
Revision History:	I01 – Issued March 12, 2003 I02 – Issued November 17, 2003 I03 – Issued August 4, 2004 I04 – Issued November 24, 2004 I05 – Issued April 8, 2005 I06 – Issued August 12, 2005 I07 – Issued December 9, 2005 I08 – Issued April 7, 2006 I09 – Issued July 28, 2006 I10 – Issued December 22, 2006 I11 – Issued February 23, 2007 I12 – Issued May 18, 2007			
Date:	May 18, 2007			
Status:	Work in Progress	Draft	Issued	Closed
Distribution Restrictions:	Author Only	CL/Member	CL/Member/Vendor	Public

Key to Document Status Codes:

- Work in Progress** An incomplete document, designed to guide discussion and generate feedback, that may include several alternative requirements for consideration.
- Draft** A document in specification format considered largely complete, but lacking review by Members and vendors. Drafts are susceptible to substantial change during the review process.
- Issued** A stable document, which has undergone rigorous member and vendor review and is suitable for product design and development, cross-vendor interoperability, and for certification testing.
- Closed** A static document, reviewed, tested, validated, and closed to further engineering change requests to the specification through CableLabs.

Trademarks:

DOCSIS®, eDOCSIS™, M-CMTS™, PacketCable™, CableHome®, CableOffice™, OpenCable™, CableCARD™, OCAP™, DCAS™, and CableLabs® are trademarks of Cable Television Laboratories, Inc.

Contents

1	INTRODUCTION	1
1.1	SCOPE.....	1
1.2	GOALS.....	1
1.3	DOCSIS BASE SPECIFICATIONS	1
1.4	REQUIREMENTS	2
2	REFERENCES	3
2.1	NORMATIVE REFERENCES	3
2.2	INFORMATIVE REFERENCES	4
2.3	REFERENCE ACQUISITION.....	5
3	GLOSSARY	6
4	ABBREVIATIONS.....	8
5	EMBEDDED DOCSIS CABLE MODEM	9
5.1	DEVICE INTERFACE REFERENCE MODEL	9
5.2	eDOCSIS REQUIREMENTS	16
5.2.1	<i>General Requirements</i>	<i>16</i>
5.2.2	<i>Interface Requirements.....</i>	<i>17</i>
5.2.3	<i>Operations Support Requirements.....</i>	<i>18</i>
5.2.4	<i>DHCPv4 Option 43 Syntax Requirements</i>	<i>23</i>
5.2.5	<i>DHCPv6 Vendor Specific Option Syntax Requirements.....</i>	<i>31</i>
5.2.6	<i>Testability Requirements</i>	<i>35</i>
5.2.7	<i>Firmware Download.....</i>	<i>40</i>
5.2.8	<i>eSAFE configuration</i>	<i>42</i>
	ANNEX A SLED MIB DEFINITION	44
	ANNEX B ESAFE MIB DEFINITION	49
	ANNEX C FORMAT AND CONTENT FOR ECM/ESTB EVENT, SYSLOG, AND SNMP TRAP EXTENSIONS	59
	APPENDIX I ACKNOWLEDGEMENTS	60
	APPENDIX II REVISION HISTORY	61

Figures

FIGURE 5-1 - EDOCSIS REFERENCE MODEL	10
FIGURE 5-2 - CABLEHOME HOME ACCESS EDOCSIS DEVICE REFERENCE MODEL	10
FIGURE 5-3 - ECM - EPS PROTOCOL STACKS	11
FIGURE 5-4 - PACKETCABLE E-MTA (WITH DOCSIS CM) EDOCSIS REFERENCE MODEL	11
FIGURE 5-5 - ECM - EMTA PROTOCOL STACKS	12
FIGURE 5-6 - OPENCABLE HOST 2.0 EDOCSIS REFERENCE MODEL	12
FIGURE 5-7 - ECM – ESTB PROTOCOL STACKS – OPENCABLE HOST 2.0 – UNICAST IP FLOW.....	13
FIGURE 5-8 - EMBEDDED SECURITY STB EDOCSIS REFERENCE MODEL	14
FIGURE 5-9 - ECM – ESTB PROTOCOL STACKS – EMBEDDED SECURITY STB	14
FIGURE 5-10 - BSoD eTEA (WITH DOCSIS CM) EDOCSIS REFERENCE MODEL	15
FIGURE 5-11 - ECM - eTEA PROTOCOL STACKS	15
FIGURE 5-12 - DOCSIS eROUTER EDOCSIS DEVICE REFERENCE MODEL	15
FIGURE 5-13 - DOCSIS IPv4 eROUTER EDOCSIS DEVICE REFERENCE MODEL	16
FIGURE 5-14 - DOCSIS IPv6 eROUTER EDOCSIS DEVICE REFERENCE MODEL	16
FIGURE 5-15 - SLED REFERENCE MODEL	36
FIGURE 5-16 - SLED PACKET LOOPBACK ENCAPSULATION.....	38
FIGURE 5-17 - SLED PACKET LOOPBACK AND GENERATION SEQUENCES.....	39

Tables

TABLE 5-1 - EDOCSIS IFTABLE INTERFACE DESIGNATIONS	19
TABLE 5-2 - [RFC 2863] IFTABLE, MIB-OBJECT DETAILS FOR EDOCSIS DEVICE INTERFACES.....	20
TABLE 5-3 - [RFC 2011] IPNetToMedia MIB-OBJECT DETAILS FOR EDOCSIS DEVICE INTERFACES.....	21
TABLE 5-4 - IPNetToPhysical MIB-OBJECT DETAILS FOR EDOCSIS DEVICE INTERFACES.....	21
TABLE 5-5 - DOT1dStaticTable ENTRIES FOR DSG MAC ADDRESSES	22
TABLE 5-6 - DHCP OPTION 43 SYNTAX.....	26
TABLE 5-7 - EXAMPLE EDOCSIS DEVICE: E-MTA	27
TABLE 5-8 - EXAMPLE EDOCSIS DEVICE: DOCSIS 1.1 CABLEHOME/E-PS	28
TABLE 5-9 - EXAMPLE EDOCSIS DEVICE: DOCSIS 1.1 EMBEDDED STB	28
TABLE 5-10 - EXAMPLE EDOCSIS DEVICE CONTAINING DOCSIS 2.0 ECM, EMTA AND EPS	29
TABLE 5-11 - EXAMPLE EDOCSIS DEVICE: DOCSIS 1.1 TEA.....	30
TABLE 5-12 - DOCSIS CABLE MODEM WITH EMBEDDED ROUTER	31
TABLE 5-13 - ECM eSAFE TLVs	42
TABLE C-1 - EDOCSIS EVENTS EXTENSIONS	59

1 INTRODUCTION

Existing DOCSIS specifications were created for stand-alone cable modems that provide high-speed broadband services using the hybrid-fiber-coaxial cable infrastructure. The emergence of a class of devices that embeds additional functionality with a Cable Modem, such as packet-telephony, home networking and video, has necessitated the creation of this specification to define additional requirements such as interfaces, management and provisioning models. This is necessary to ensure that the Cable Modem will function properly and interact properly with the embedded Service/Application Functional Entities (eSAFEs).

1.1 Scope

This specification defines additional features that must be added to a DOCSIS Cable Modem for implementations that embed the Cable Modem with another application, such as a PacketCable MTA.¹

1.2 Goals

The goals for this specification are:

- To preserve functional separation of the DOCSIS cable modem entity from eSAFEs within the eDOCSIS Device, so that existing DOCSIS cable plant integrity, cable modem configuration, management and provisioning security are not compromised.
- To isolate DOCSIS cable modem functionality so that specification compliance can be tested for the eCM component independent of eSAFEs.
- To enable the service provider to enable or disable forwarding traffic between each eSAFE and the eCM within the eDOCSIS Device.
- To maximize compatibility with existing back-office management/provisioning infrastructure so that new services enabled by eDOCSIS devices can be deployed rapidly.
- To architect eDOCSIS devices in such a way as to scale to new services and applications, and to take advantage of technology innovations to achieve low cost and high functionalities.²

1.3 DOCSIS Base Specifications

There are currently three versions of what are in this document referred to as the DOCSIS Base Specifications. These three versions are commonly referred to as DOCSIS 1.0, DOCSIS 1.1, and DOCSIS 2.0. A list of the document categories in the Data-Over-Cable Service Interface Specifications family is provided below. For updates, please refer to <http://www.cablemodem.com/>.

Designation			Title
DOCSIS 1.0	DOCSIS 1.1	DOCSIS 2.0	
SP-RFI	SP-RFIv1.1	SP-RFIv2.0	Radio Frequency Interface Specification
SP-OSSI	SP-OSSIv1.1	SP-OSSIv2.0	Operations Support System Interface Specification

¹ Edited per EDOCS-N-03099, 11/11/03, po

² Edited per EDOCS-N-03099, 11/11/03, po

Designation			Title
DOCSIS 1.0	DOCSIS 1.1	DOCSIS 2.0	
SP-BPI	SP-BPI+	SP-BPI+	Baseline Privacy Interface Specification
SP-CMCI			Cable Modem to Customer Premises Equipment Interface Specification
SP-CMTS-NSI			Cable Modem Termination System Network Side Interface Specification

1.4 Requirements

Throughout this document, the words that are used to define the significance of particular requirements are capitalized. These words are:

“MUST”	This word means that the item is an absolute requirement of this specification.
“MUST NOT”	This phrase means that the item is an absolute prohibition of this specification.
“SHOULD”	This word means that there may exist valid reasons in particular circumstances to ignore this item, but the full implications should be understood and the case carefully weighed before choosing a different course.
“SHOULD NOT”	This phrase means that there may exist valid reasons in particular circumstances when the listed behavior is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behavior described with this label.
“MAY”	This word means that this item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because it enhances the product, for example; another vendor may omit the same item.

2 REFERENCES

2.1 Normative References

In order to claim compliance with this specification, it is necessary to conform to the following standards and other works as indicated, in addition to the other requirements of this specification. Notwithstanding, intellectual property rights may be required to use or implement such normative references.

[BPI+]	DOCSIS Baseline Privacy Plus Interface Specification, CM-SP-BPI+-I12-050812, August 12, 2005, Cable Television Laboratories, Inc. ³
[CANN-DHCP]	CableLabs DHCP Options Registry, CL-SP-CANN-DHCP-Reg-I01-070119, January 19, 2007, Cable Television Laboratories, Inc. ⁴
[CCIF 2.0]	CableCARD™ Interface 2.0 Specification, OC-SP-CCIF2.0-I09-070105, January 5, 2007, Cable Television Laboratories, Inc. ⁵
[CL BB]	Battery Backup MIB Specification, CL-SP-MIB-BB-I02-070119, January 19, 2007, Cable Television Laboratories, Inc.
[DOCSIS-CMCI]	DOCSIS Cable Modem to Customer Premise Equipment Interface Specification, CM-SP-CMCI-I10-050408, April 8, 2005, Cable Television Laboratories, Inc.
[DOCSIS RFI]	Refers to both [RFI 1.1] and [RFI 2.0].
[DOCSIS OSS]	Refers to both [OSSI 1.1] and [OSSI 2.0].
[DSG]	DOCSIS Set-Top Gateway (DSG) Specification, CM-SP-DSG-I10-070223, February 23, 2007, Cable Television Laboratories, Inc. ⁶
[eRouter]	DOCSIS eRouter Specification, CM-SP-eRouter-I03-070518, May 18, 2007, Cable Television Laboratories, Inc. ⁷
[HOST2.0]	OpenCable Host 2.0 Core Functional Requirements, OC-SP-HOST2.0-CFR-I12-070105, January 5, 2007, Cable Television Laboratories, Inc. ⁸
[MULPI]	DOCSIS 3.0 MAC and Upper Layer Protocols Interface Specification, CM-SP-MULPIv3.0-I03-070518, May 18, 2007, Cable Television Laboratories, Inc.
[OSSI 1.0]	ANSI/SCTE 22-3 2002: DOCSIS 1.0 Operations Support System Interface.
[OSSI 1.1]	DOCSIS Operations Support System Interface Specification, SP-OSSIV1.1-C01-050907, September 7, 2005, Cable Television Laboratories, Inc.
[OSSI 2.0]	DOCSIS Operations Support System Interface Specification, CM-SP-OSSIV2.0-I09-050812, August 12, 2005, Cable Television Laboratories, Inc.

³ Added per eDOCSIS-N-04.0154-2 by kb 7/18/04.

⁴ Added by eDOCSIS-N-06.0343-2 by kb 2/1/07.

⁵ Added per eDOCSIS-N-04.0154-2 by kb 7/18/04; Revised per eDOCSIS-N-05.0260-2 by GO on 11/30/05.

⁶ Added per eDOCSIS-N-04.0151-3 by kb 7/18/04. Revised by KN on 4/19/07.

⁷ Added by eDOCSIS-N-06.0343-2 by kb 2/1/07.

⁸ Added per eDOCSIS-N-04.0151-3 by kb 7/18/04; made normative per eDOCSIS-N-05.0210-2 by kb 3/15/05.

- [RFC 1493] IETF RFC 1493, Definitions of Managed Objects for Bridges, E. Decker, P. Langille, A. Rijsinghani & K. McCloghrie, July 1993.
- [RFC 2011] IETF RFC 2011, SNMPv2 Management Information Base for the Internet Protocol using SMIv2, K. McCloghrie, November 1996.
- [RFC 2863] IETF RFC 2863, The Interfaces Group MIB, K. McCloghrie, F. Kastenholz, June 2000.
- [RFC 3418] IETF RFC 3418, Management Information Base (MIB) for the Simple Network Management Protocol (SNMP), R. Presuhn, Ed., June 2000.⁹
- [RFC 2131] IETF RFC 2131, Dynamic Host Configuration Protocol, Droms, R., March 1997.
- [RFC 2132] IETF RFC 2132, DHCP Options and BOOTP Vendor Extensions, Alexander, S., and R. Droms, March 1997.
- [RFC 3396] IETF RFC 3396, Encoding Long Options in the Dynamic Host Configuration Protocol (DHCPv4), Lemon, T., and S. Cheshire, November, 2002.¹⁰
- [RFC 4293] IETF RFC 4293, Management Information Base for the Internet Protocol (IP), S. Routhier, April 2006.¹¹
- [RFC 791] IETF STD5, RFC 791, Internet Protocol, J. Postel, September 1981.
- [RFC 768] IETF STD6, RFC 768, User Datagram Protogram, J. Postel, September, 1980.
- [RFI 1.0] ANSI/SCTE 22-1 2002: DOCSIS 1.0 Radio Frequency Interface.
- [RFI 1.1] DOCSIS Radio Frequency Interface Specification, SP-RFiv1.1-C01-050907, September 7, 2005, Cable Television Laboratories, Inc.
- [RFI 2.0] DOCSIS Radio Frequency Interface Specification, CM-SP-RFiv2.0-I11-060602, June 2, 2006, Cable Television Laboratories, Inc.

2.2 Informative References

- [CH1.0] CableHome 1.0 Specification, CH-SP-CH1.0-C01-060728, July 28, 2006, Cable Television Laboratories, Inc.
- [CH1.1] CableHome 1.1 Specification, CH-SP-CH1.1-C01-060728, July 28, 2006, Cable Television Laboratories, Inc.¹²
- [TEI] TDM Emulation Interface Specification, CM-SP-TEI-I02-070223, February 23, 2007, Cable Television Laboratories, Inc.
- [PC10-MTA] PacketCable MTA Device Provisioning Specification, PKT-SP-PROV-I11-050812, August 12, 2005, Cable Television Laboratories, Inc.
- [PC10-MIB] PacketCable MIBs Framework Specification, PKT-SP-MIBS-I10-050812, August 12, 2005, Cable Television Laboratories, Inc.

⁹ Added per eDOCSIS-N-07.0394-2 4/19/07, KN

¹⁰ Edited per EDOCS-N-03084/ 11/11/03, po

¹¹ Added by eDOCSIS-N-06.0343-2 by kb 2/1/07.

¹² Edited per EDOCS-N-03084/ 11/11/03, po

[RFC 2578] IETF RFC 2578, Structure of Management Information Version 2 (SMIv2), K. McCloghrie, D. Perkins, J. Schoenwaelder, April 1999.

2.3 Reference Acquisition

- Cable Television Laboratories, Inc., 858 Coal Creek Circle, Louisville, CO 80027; Phone +1-303-661-9100; Fax +1-303-661-9199; Internet: <http://www.cablelabs.com/>
- SCTE Standards, Society of Cable Telecommunication Engineers, 140 Philips Road, Exton PA 19341-1318, Phone +1-610-524-1725, www.scte.org
- IETF Standards, Internet Engineering Task Force (IETF) Secretariat c/o Corporation for National Research Initiatives, 1895 Preston White Drive, Suite 100, Reston, VA 20191-5434, Phone +1-703-620-8990, Fax +1-703-620-9071, Internet: www.ietf.org

3 GLOSSARY

This specification uses the following terms.

CableCARD™ Device	A PCMCIA card distributed by cable providers and inserted into a Host device to enable premium services in compliance with the OpenCable specifications; also called “Card” and “Point of Deployment” (POD) module. ¹³
CMCI	Cable Modem (CM) to Customer Premise Equipment (CPE) Interface as defined in [DOCSIS-CMCI].
eCM	An eCM is an embedded Cable Modem, i.e., one that has been enhanced with the features of this specification.
eDOCSIS	eDOCSIS is the embedded DOCSIS specification that defines the interface between the eCM and an eSAFE.
eDOCSIS Device	An eDOCSIS Device is one that includes an eCM entity, one or more eSAFEs and supports a single software image download that is used for the entire device. ¹⁴
Embedded Security eSTB	An eSTB with integrated security functions.
eMTA	Embedded Multimedia Terminal Adaptor. An embedded version of an MTA.
E-MTA	Embedded MTA device. An eDOCSIS device that contains both an eMTA and an eCM.
ePS	Embedded Portal Service Element. A CableHome-compliant eSAFE that provides management and network address translation functions between the DOCSIS network and the home network.
eRouter	DOCSIS Embedded Router: An eSAFE that is compliant with [eRouter], providing version 4 and/or version 6 Internet Protocol-formatted data forwarding, address configuration, and Domain Name services to Internet Protocol host devices connected to the cable modem in a customer’s premises. ¹⁵
eSTB	Embedded Set-Top Box: An eSAFE that is compliant with [DSG], providing video, audio and data services. An example OpenCable-compliant eSTB is further specified in [HOST2.0]. ¹⁶

¹³ Added per eDOCSIS-N-06.0355-2 by kb on 2/1/07.

¹⁴ Edited per EDOCS-N-03099, 11/11/03, po; eDOCSIS-N-05.0223-3 by kb 7/18/05.

¹⁵ Added by eDOCSIS-N-06.0343-2 by kb 2/1/07.

¹⁶ Added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

eTEA	Embedded TDM Emulator Adapter: An eSAFE that is compliant with [TEI], providing T1 and E1 Circuit transport over IP.
LCI	Logical CPE Interface. A bi-directional or uni-directional data-only logical 802.3/Ethernet MAC frame interface between eCM and an eSAFE. ¹⁷
MTA	Multimedia Terminal Adapter as defined in [PC10-MTA]. Contains the interface to a physical voice device, a network interface, CODECs, and all signaling and encapsulation functions required for VoIP transport, class features signaling and QoS signaling.
eSAFE (embedded Service/Application Functional Entity)	An embedded version of CableLabs-specified application, such as a PacketCable Multimedia Terminal Adapter (MTA), that provides a service using the DOCSIS IP platform, or a function or set of functions, such as the CableHome Portal Services logical element, that supports the delivery of one or more services over an IP platform.
OpenCable Host eSTB	An eSTB device built to CableLabs OpenCable Host specifications.
Secure Microprocessor	The security element in a device that supports downloadable conditional access. ¹⁸
Set-top Device	An eDOCSIS device that contains an eSTB.
TDM	Time Division Multiplexing: The means by which multiple digital signals can be carried on a single transmission path by interleaving portions of each signal in time.

¹⁷ Revised per eDOCSIS-N-04.0160-1 by kb 7/28/04.

¹⁸ Added per eDOCSIS-N-06.0355-2 by kb on 2/1/07.

4 ABBREVIATIONS

This specification uses the following abbreviations:¹⁹

CM	Cable Modem
CMCI	Cable Modem to Customer Premises Equipment Interface
DOCSIS	Data-Over-Cable Service Interface Specifications
DSG	DOCSIS Set-top Gateway
eCM	Embedded Cable Modem
eDOCSIS	Embedded DOCSIS
eMTA	Embedded Multimedia Terminal Adapter
ePS	Embedded Portal Services Element
eSTB	Embedded Set-Top Box
eSAFE	Embedded Service/Application Functional Entity
eTEA	Embedded T1/E1 TDM Emulation Adapter (TEA)
LCI	Logical CPE Interface
SLED	Software Loopback for eDOCSIS
SSD	Secure Software Download
TDM	Time Division Multiplexing

¹⁹ List revised per ECNs eDOCSIS-N-04.0151-3, eDOCSIS-N-04.0160-1, eDOCSIS-N-06.0271-2; eDOCSIS-N-06.0281-5

5 EMBEDDED DOCSIS CABLE MODEM

5.1 Device Interface Reference Model

Referring to Figure 5-1²⁰, an eDOCSIS device consists of an embedded DOCSIS cable modem (eCM) and one or more embedded Service/Application Functional Entities (eSAFEs). An eDOCSIS device may also have one or more physically exposed interfaces. In addition, only a single secured software image download is used for the entire eDOCSIS device.

eSAFEs include:

- ePS: embedded CableHome Portal Services Logical Element [CH1.0], [CH1.1]
- eMTA: embedded PacketCable Multimedia Terminal Adapter [PC10-MTA], [PC10-MIB]
- eSTB: embedded Set-Top Box: An eSAFE that is compliant with [DSG], providing video, audio and data services. An example OpenCable-compliant eSTB is further specified in [HOST2.0].²¹
- eTEA: embedded T1/E1 TDM Emulation Adapter (eTEA) [TEI].²²
- eRouter: An eSAFE that is compliant with [eRouter], providing Internet Protocol data forwarding, address configuration, and Domain Name services.²³

Within an eDOCSIS device, each eSAFE interfaces to the eCM via a point-to-point logical CPE interface.

Figure 5-2 presents a typical CableHome Home Access eDOCSIS Device reference model.

Figure 5-3 presents a logical view of protocol stacks for an eCM to ePS interface.

Figure 5-4 presents a typical PacketCable E-MTA (with DOCSIS cable modem) eDOCSIS Device reference model.

Figure 5-5 presents a logical view of protocol stacks for an eCM to eMTA interface.

Figure 5-6 presents a typical OpenCable Host 2.0 eDOCSIS Device reference model where the Host provides DSG Flow, Socket Flow and IP Flow support – NOTE: the CableCARD may support Socket Flow or IP Flow or both, but neither is supported simultaneously by the Host.²⁴

Figure 5-7 presents a logical view of protocol stacks for an eCM to eSTB to CableCARD interface (OpenCable Host 2.0) where the Host provides DSG Flow, Socket Flow and IP Flow support – NOTE: the CableCARD may support Socket Flow or IP Flow or both, but neither is supported simultaneously by the Host.²⁵

Figure 5-8 presents a typical embedded security STB eDOCSIS Device reference model.²⁶

Figure 5-9 presents a logical view of protocol stacks for an eCM to eSTB interface (embedded security STB).²⁷

²⁰ New figure per eDOCSIS-N-06.0343-2 by kb 2/1/07.

²¹ Added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

²² Added per eDOCSIS-N-06.0271-2 by kb 7/24/06.

²³ Added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

²⁴ Figure added per eDOCSIS-N-04.0151-3 by kb 7/18/04; revised statement per eDOCSIS-N-06.0283-3 by GO on 10/4/06.

²⁵ Figure added per eDOCSIS-N-04.0151-3 by kb 7/18/04; revised statement per eDOCSIS-N-06.0283-3 by GO on 10/4/06.

²⁶ Figure added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

²⁷ Figure added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

Figure 5-10 presents a typical T1/E1 TDM Emulation Adapter (TEA) eDOCSIS device Reference model.²⁸

Figure 5-11 presents a logical view of protocol stacks for an eCM to eTEA interface (embedded TDM Emulation Adapter).²⁹

Figure 5-12 presents a typical DOCSIS eRouter eDOCSIS Device reference model.³⁰

Figure 5-13 presents a logical view of protocol stacks for an eCM to IPv4 eRouter interface.³¹

Figure 5-14 presents a logical view of protocol stacks for an eCM to IPv6 eRouter interface.³²

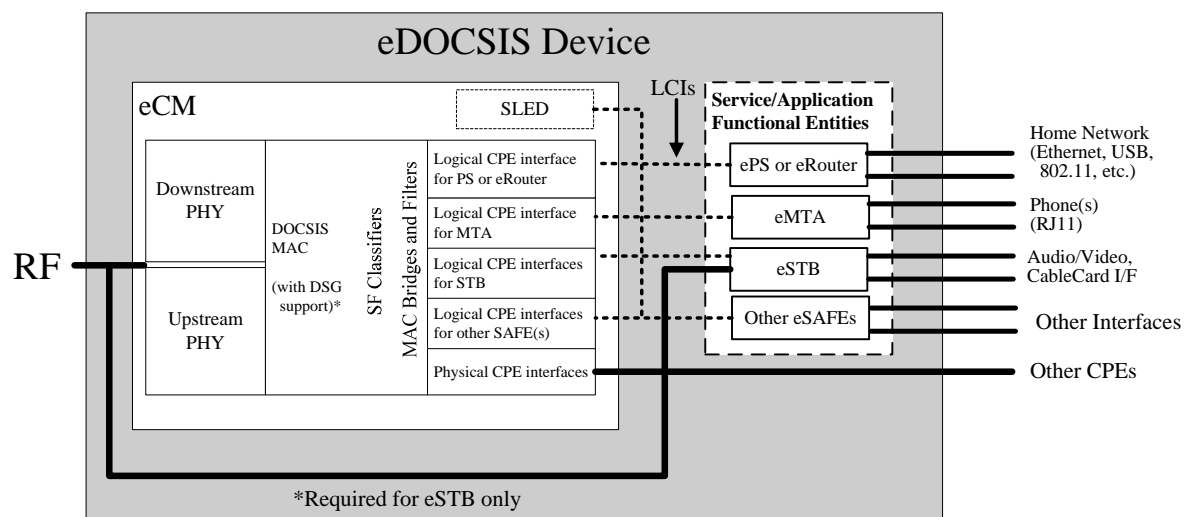


Figure 5-1 - eDOCSIS Reference Model

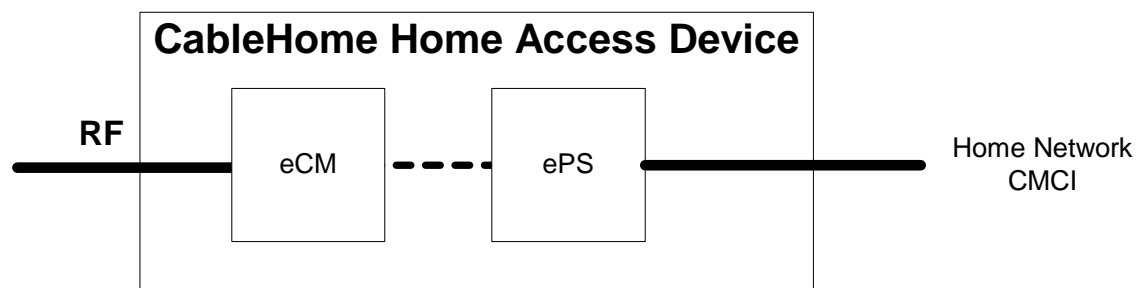


Figure 5-2 - CableHome Home Access eDOCSIS Device Reference Model

²⁸ Figure added per eDOCSIS-N-06.0271-2 by kb 7/24/06.

²⁹ Figure added per eDOCSIS-N-06.0271-2 by kb 7/24/06.

³⁰ Added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

³¹ Added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

³² Added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

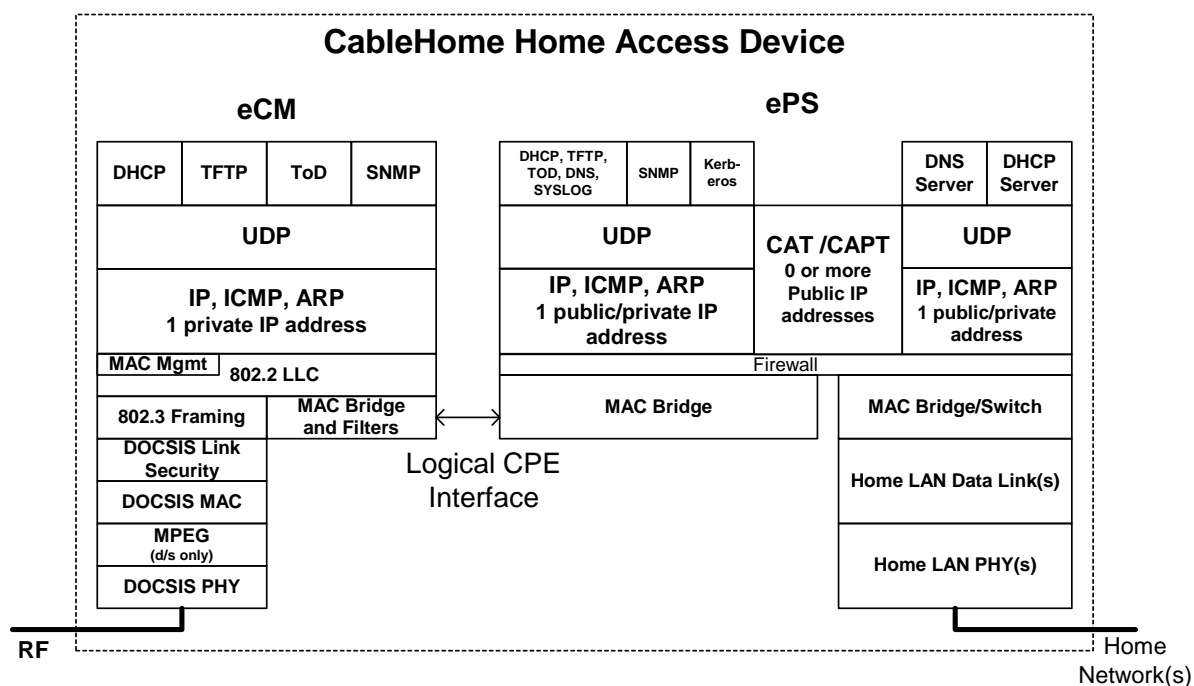


Figure 5-3 - eCM - ePS Protocol Stacks

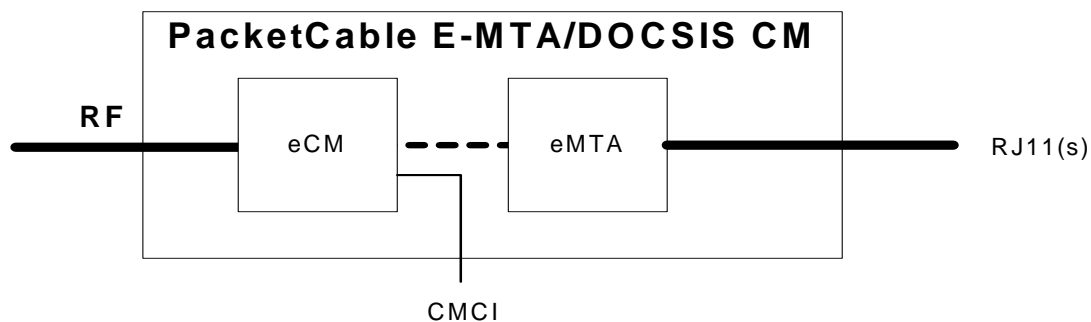


Figure 5-4 - PacketCable E-MTA (with DOCSIS CM) eDOCSIS Reference Model

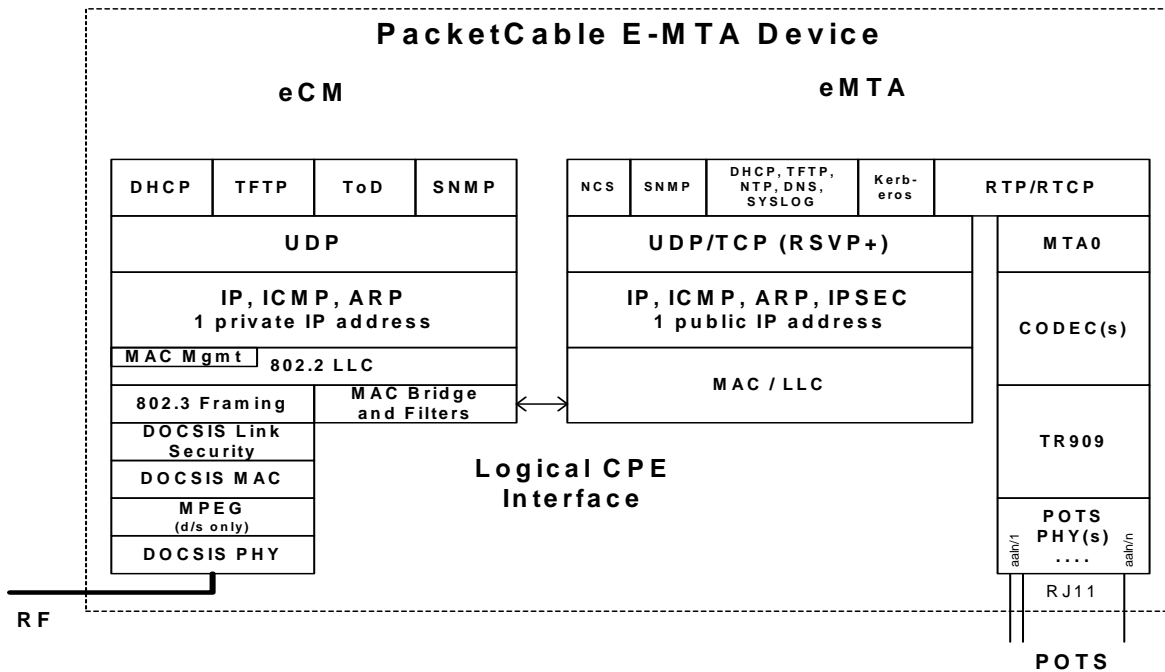


Figure 5-5 - eCM - eMTA Protocol Stacks

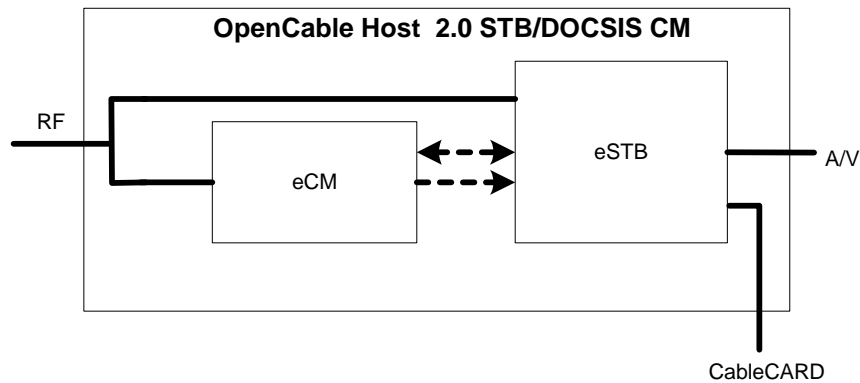


Figure 5-6 - OpenCable Host 2.0 eDOCSIS Reference Model

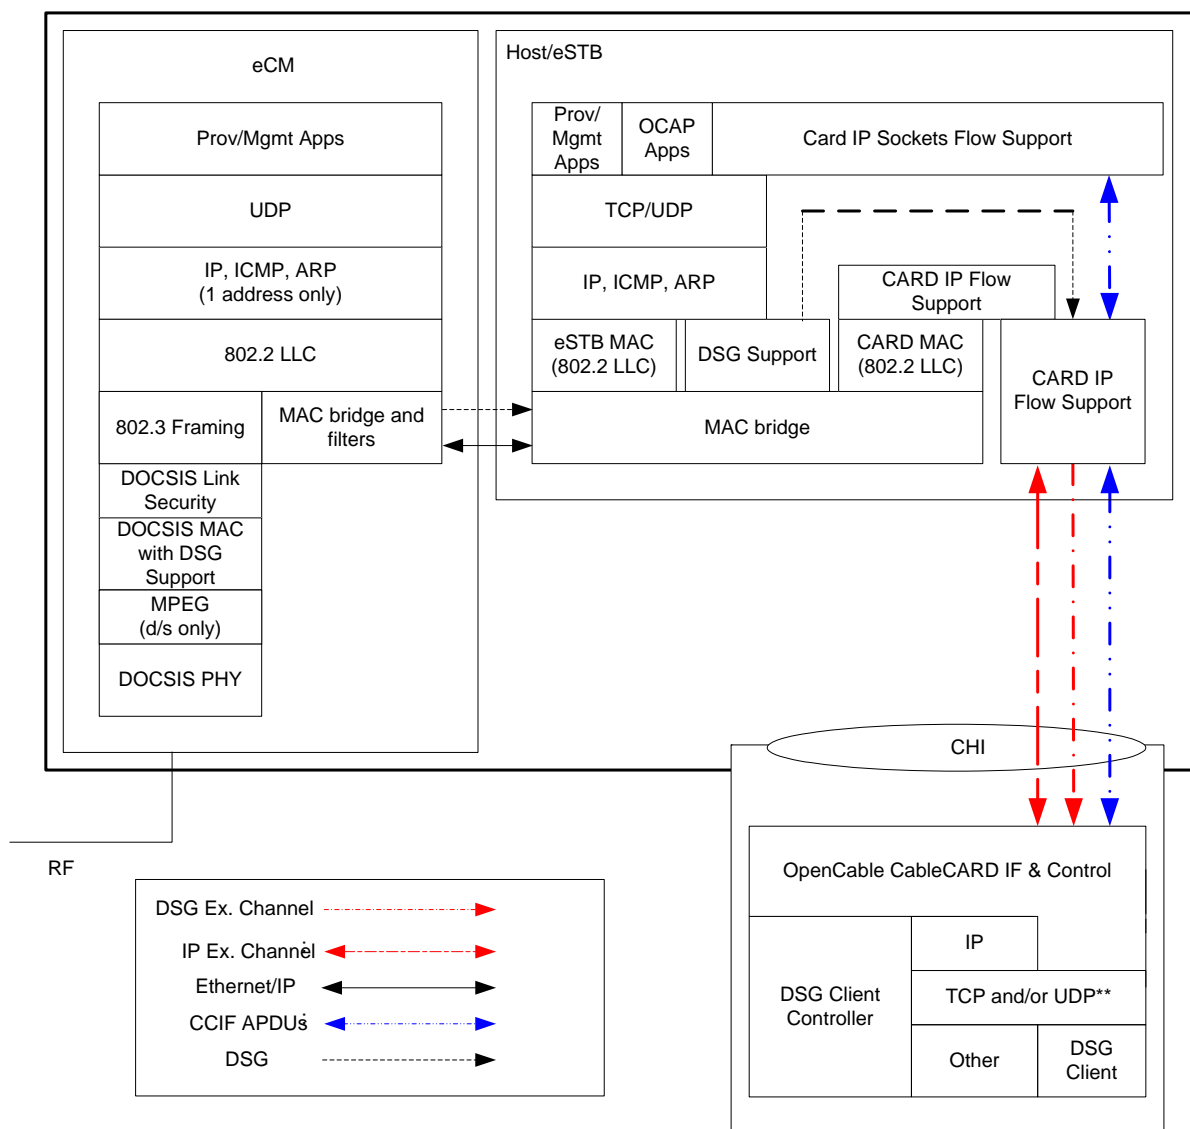


Figure 5-7 - eCM – eSTB Protocol Stacks – OpenCable Host 2.0 – Unicast IP Flow³³

³³ Revised this figure and title per eDOCSIS-N-06.0283-3 by GO on 10/4/06.

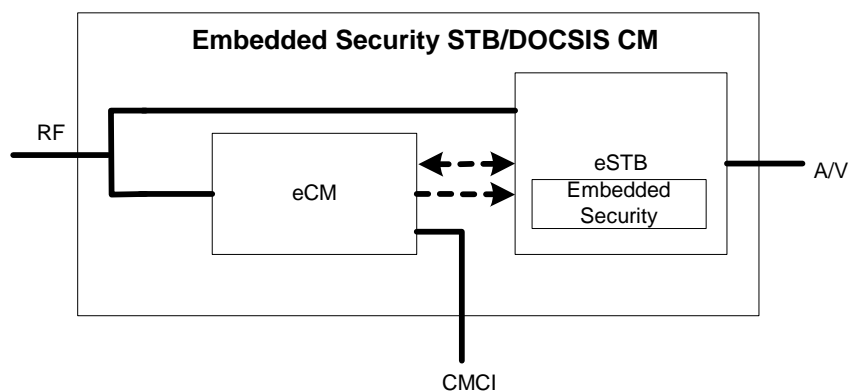


Figure 5-8 - Embedded Security STB eDOCSIS Reference Model

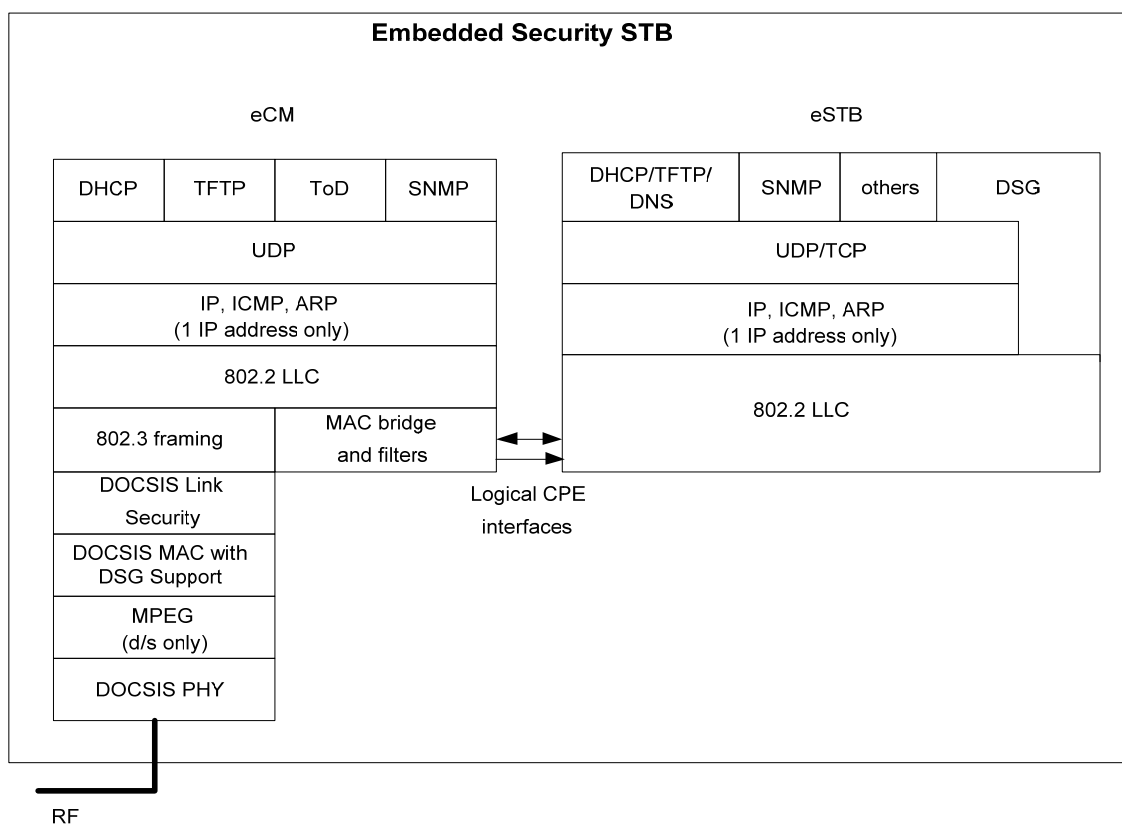


Figure 5-9 - eCM – eSTB Protocol Stacks – Embedded Security STB

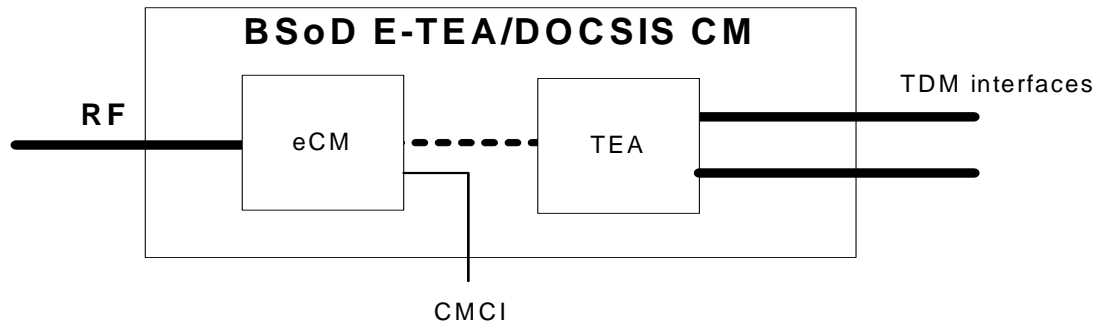


Figure 5-10 - BSoD eTEA (with DOCSIS CM) eDOCSIS Reference Model

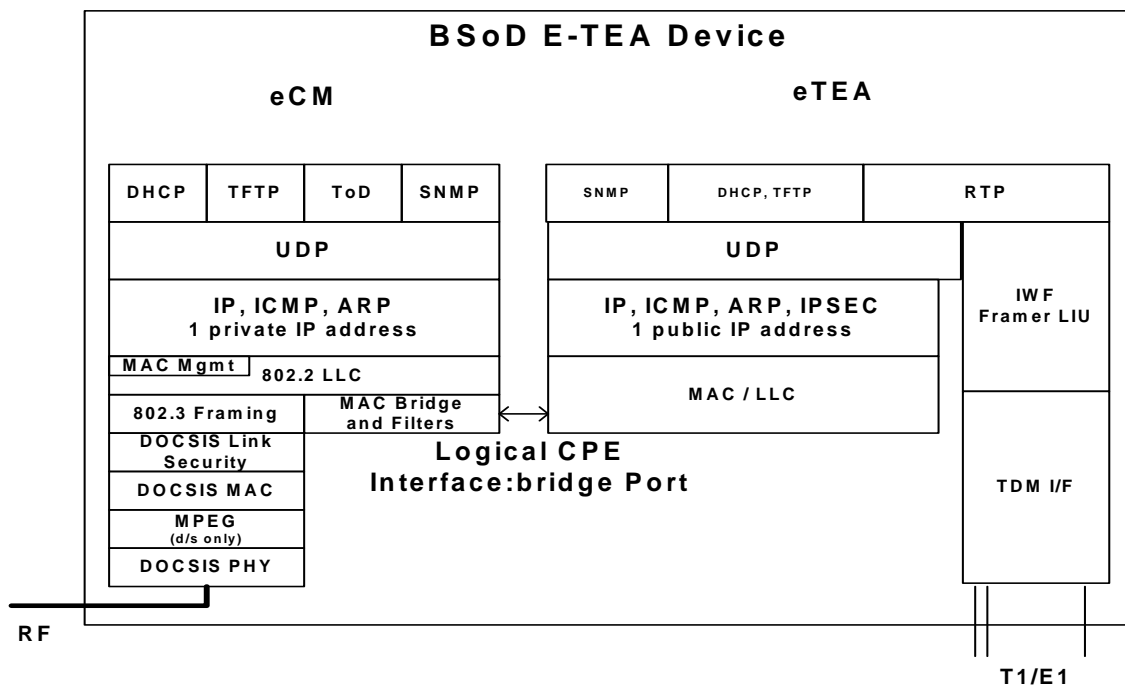


Figure 5-11 - eCM - eTEA Protocol Stacks

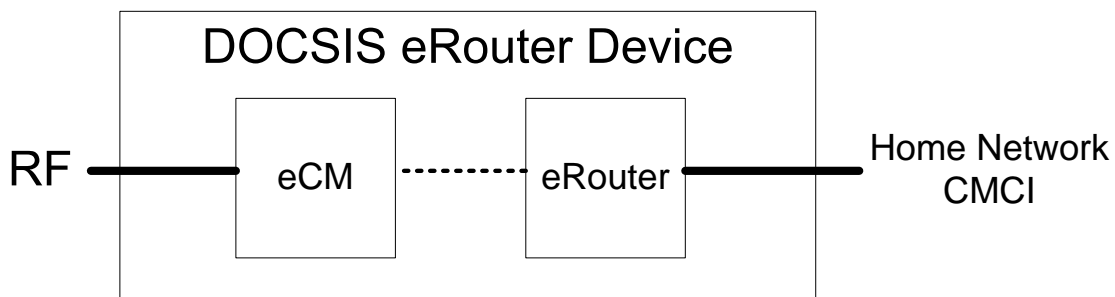


Figure 5-12 - DOCSIS eRouter eDOCSIS Device Reference Model

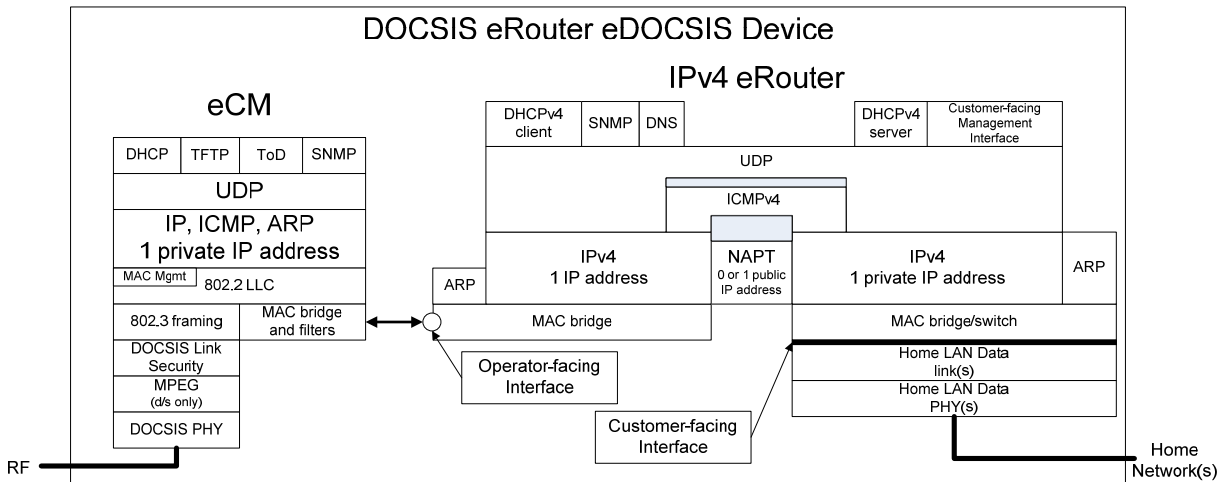


Figure 5-13 - DOCSIS IPv4 eRouter eDOCSIS Device Reference Model

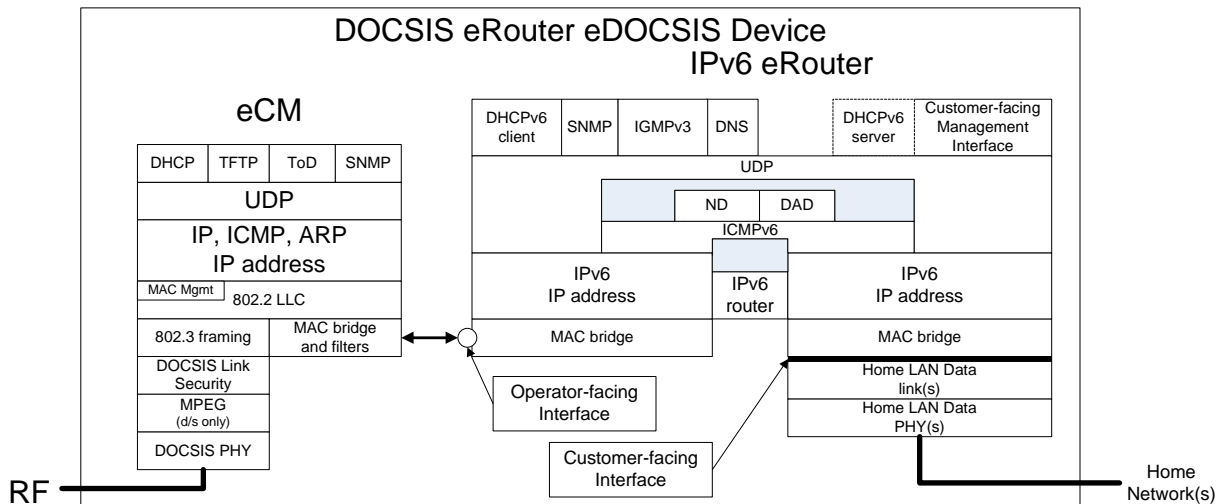


Figure 5-14 - DOCSIS IPv6 eRouter eDOCSIS Device Reference Model

5.2 eDOCSIS Requirements

5.2.1 General Requirements³⁴

The eCM will provide an SNMP agent which is logically separated from any SNMP agent provided by an eSAFE.

Except for MIB objects that are explicitly allowed to be shared, the DOCSIS-specified MIBs MUST only be accessible through the Management IP address of the eCM. The eSAFE-specified MIBs MUST NOT be accessible through the Management IP address of the eCM.

³⁴ Changes to section made per eDOCSIS 07.0394-2 #2 on 4/19/07 by KN.

The MIB objects that MAY be shared when applicable are:

- An eDOCSIS device MAY share MIB objects from [RFC 3418]. As an exception, the eDOCSIS device MUST share the sysDescr MIB object³⁵ and report its value as defined in [DOCSIS OSS]
- An eDOCSIS device MAY share MIB objects from UDP-MIB and IP-MIB. However, the eDOCSIS device MUST not share MIB objects from IP-MIB that define per-interface management information (e.g., ipNetToMediaTable or IpNetToPhysicalTable; see 5.2.3.2).
- An eDOCSIS device MAY share MIB objects rooted under snmpV2 ([RFC 2578]).

The eCM MUST act as an entity distinct from, and MUST have logical CPE interfaces to, the eSAFEs.

All messages coming from the DOCSIS data network (labeled RF in the diagrams) destined for eSAFEs MUST be processed through the eCM first.

The eCM MUST be the only interface to the DOCSIS data network.

In addition, only a single secured software image download MUST be used for the entire eDOCSIS device and it MUST be controlled by the eCM.

For an eDOCSIS device containing an eSTB, the eCM MUST implement DSG client support functionality including one-way DOCSIS and DCD MAC message as specified in [DSG].³⁶

An eDOCSIS device MUST NOT implement both an ePS and an eRouter simultaneously.³⁷

An eCM MUST meet the requirements of an equivalent standalone cable modem as specified in the applicable DOCSIS Base Specifications. In case any requirement in this document conflicts with a requirement in the DOCSIS Base Specifications (i.e., DOCSIS 1.0, 1.1 and DOCSIS 2.0), the requirement in this document takes precedence for any eDOCSIS Device.³⁸

5.2.2 Interface Requirements

The bridging function between RF port and the CPE interfaces (logical or physical) MUST be equivalent to that of a multi-port learning bridge. Each CPE interface MUST comply with the CM Forwarding Rules defined in [DOCSIS RFI]³⁹. In particular:⁴⁰

- MAC addresses of each eSAFE MUST be counted toward the total allowed by the Maximum Number of CPEs configuration setting.

Note that an OpenCable Host STB, where the CableCARD opens an IP Flow, will have at least 2 MAC addresses, one for the eSTB and one for the CableCARD. In this case, both MAC Addresses MUST be counted toward the total allowed by the Maximum Number of CPEs configuration setting.⁴¹

- The DSG tunnel MAC addresses associated with ifIndex=18 MUST NOT be counted in the MaxCPE count of the eCM configuration file.⁴²

35 In order to associate one unique image to an eDOCSIS device, the sysDescr MIB value is shared among eCM and eSAFEs. This is defined with the purpose of providing a mechanism to properly associate a firmware image with the eDevice vendor name and hardware model.

36 Paragraph added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

37 Paragraph added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

38 Edited per EDOCS-N-03099, 11/11/03, po

39 [DOCSISx-RFI] is a shorthand notation for [RFI 1.0], [RFI 1.1], and [RFI 2.0]

40 Section modified per eDOCSIS-N-04.0150-2, 7/12/04, kb

41 Added this note per eDOCSIS-N-06.0283-3 by GO on 10/4/06.

42 Bullet added per eDOCSIS-N-04.0182-2 by kb 11/2/04.

- Packet forwarding and filtering rules defined in [DOCSIS RFI] specification MUST apply to both logical and physical interfaces to eSAFEs as defined in this specification and in [DOCSIS OSS].⁴³
- Data forwarding through the interfaces to all eSAFEs - with the exception of the interface to the DSG Client (ifIndex 18) - MUST obey the Network Access Control Object as defined in [DOCSIS RFI]. NACO state does not affect the forwarding of DSG traffic (through ifIndex 18) in an eDOCSIS device containing an eSTB.

5.2.3 Operations Support Requirements

5.2.3.1 ifTable Requirements

The eCM MUST represent the logical interface to each eSAFE with an entry in the ifTable with ifType other(1) as described in [DOCSIS OSS] and as detailed below.

If the eCM is embedded into a device which contains an active (i.e., not disabled) ePS, or an eRouter, then:⁴⁴

- The eCM MUST use ifIndex 1 (the Primary CPE interface) to represent the logical interface between the eCM and the ePS or between the eCM and the eRouter.
- The eCM MUST NOT report in the ifTable the physically exposed interfaces associated with the ePS or with the eRouter.
- The eCM MUST NOT report the MIB Module extensions associated with ePS or eRouter interfaces exposed to the customer premises (e.g., EtherLike-MIB and USB-MIB).

If the eCM is embedded into a device that contains an eRouter that is disabled, the eCM MUST report in the eCM's ifTable the physical CPE interfaces that would be associated with the eRouter if the eRouter was not disabled. Note: the ifIndex range allowed for CPE interfaces is described in Table 5-1.⁴⁵

If the eCM is embedded into a device which contains an eMTA, then:

- The eCM MUST use ifIndex 16 to represent the logical interface between the eCM and the eMTA.
- The eCM MUST NOT report in the ifTable the MTA endpoints (ifType = 198).

If the CM is embedded into a device which contains an eSTB, then:⁴⁶

- The eCM MUST use ifIndex 17 to represent the logical interface between the eCM and the eSTB for the interactive IP traffic.
- The eCM MUST use ifIndex 18 to represent the logical interface between the eCM and the eSTB for the one-way DSG tunnel traffic.
- The eCM MUST NOT report in the ifTable any other interfaces on the eSTB (such as CableCARD, DSG Clients, and A/V interfaces, etc) which are not directly and physically connected to the eCM.

If the eCM is embedded into a device which contains an eTEA, then:⁴⁷

- The eCM MUST use ifIndex 19 to represent the logical interface between the eCM and the eTEA.
- The eCM MUST NOT report in the ifTable the eTEA interfaces (ifType = ds1(18), ds0Bundle(82), etc.).

The ifXTable MUST be supported in accordance with [RFC 2863]. The Default value of ifLinkUpDownTrapEnable MUST be enabled(1) for logical interfaces to eSAFEs.

⁴³ [DOCSISx-OSSI] is a shorthand notation for [OSSI 1.0], [OSSI 1.1], and [OSSI 2.0]

⁴⁴ Paragraph and bullets modified per eDOCSIS-N-06.0343-2 by kb 2/1/07.

⁴⁵ Paragraph added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

⁴⁶ Paragraph and bullets added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

⁴⁷ Para and bullets added per eDOCSIS-N-06.0271-2 by kb 7/24/06.

The ifStackTable MUST be supported in accordance with [RFC 2863]. The logical interface to an eSAFE MUST NOT contain any sub-layers.

Table 5-1 summarizes the eCM assignment of ifIndexes to its connected interfaces. Table 5-2 defines the details of the ifTable entries that MUST be supported by ePS, eRouter, eMTA, eSTB, and eTEA.⁴⁸

Table 5-1 - eDOCSIS ifTable Interface Designations

Interface	Type
1	Primary CPE interface (CableHome ePS WAN interface or eRouter Operator-Facing Interface, when eRouter is enabled) ⁴⁹
2	CATV-MAC
3	RF-downstream channel
4	RF-Upstream channel
5 – 15	Other CPE Interfaces
16	Reserved for PacketCable/eMTA
17	Reserved for eSTB-IP ⁵⁰
18	Reserved for eSTB-DSG ⁵¹
19	Reserved for eTEA ⁵²
20 – 31	Reserved for Other eDOCSIS Interfaces

An eDOCSIS compliant eCM can have zero, one or multiple CPE interfaces, as well as interfaces to one or multiple eSAFEs. When multiple CPE interfaces are present, if filter(s) (IP, LLC, or NmAccess) are applied to the eCM's "Primary CPE Interface" (ifIndex 1), the eCM MUST also apply the same filter(s) to its "Other CPE Interfaces" (ifIndexes 5 through 15). Moreover, filters are never used to limit traffic between the CPE interfaces ("Primary CPE Interface" and "Other CPE Interfaces") within the eCM. However, if IP, LLC, or NmAccess filters are applied to the eCM's "Primary CPE Interface" (ifIndex 1), the eCM MUST NOT apply these filters to ifIndex 16 through 31, which are reserved as interfaces to eSAFEs. 33.⁵³

The above defined mechanism provides granular, independent control of filters applied to the CPE Interfaces versus those applied to the interface to each eSAFE. In addition, the eCM MUST have the ability to filter traffic at a particular interface to an eSAFE, regardless of the origination point of that traffic. This granular filter control provides the ability for the eCM to filter traffic sourced by one eSAFE that is destined to another eSAFE within the same device.⁵⁴

⁴⁸ Sentence modified per eDOCSIS-N-04.0151-3 by kb 7/18/04; revised sentence per eDOCSIS-N-06.0290-2 by GO on 10/4/06.

⁴⁹ Modified per eDOCSIS-N-06.0343-2 by kb 2/1/07.

⁵⁰ Row added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

⁵¹ Row added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

⁵² Added per eDOCSIS-N-06.0271-2 by kb 7/24/06.

⁵³ Paragraph added by eDOCSIS-N-04.0153-2 by kb; revise paragraph per eDOCSIS-N-06.0290-2 by GO on 10/4/06.

⁵⁴ Paragraph added by eDOCSIS-N-04.0153-2 by kb

Table 5-2 - [RFC 2863] ifTable, MIB-Object Details for eDOCSIS Device Interfaces

[RFC 2863] MIB-Object details for eCM-eSAFE Interfaces	ePS or eRouter	eMTA	eSTB ⁵⁵		eTEA ⁵⁶
			eSTB-IP	eSTB-DSG	
ifIndex	1	16	17	18	19
ifDescr: MUST match the text	"CableHome Embedded Interface" for the ePS, or "eRouter Embedded Interface" for the eRouter ⁵⁷	"PacketCable Embedded Interface" ⁵⁸	"Set-Top Box Embedded IP Interface"	"Set-Top Box Embedded DSG Interface"	"BSoD Embedded TEA Interface"
ifType	other(1)	other(1)	other (1)	other (1)	other(1)
ifMtu	0	0	0	0	0
ifSpeed	0	0	0	0	0
ifPhysAddress	<empty-string>	<empty-string> ⁵⁹	<empty-string>	<empty-string>	<empty-string>
ifAdminStatus: Only up/down controls are required for this interface. Other values are optional	up(1), down(2)	up(1), down(2)	up(1), down(2)	up(1), down(2)	up(1), down(2)
ifOperStatus: Only up/down controls are required for this interface. Other values are optional	up(1), down(2)	up(1), down(2)	up(1), down(2)	up(1), down(2)	up(1), down(2)
ifLastChange	<per [RFC 2863]>	<per [RFC 2863]> ⁶⁰	<per [RFC 2863]>	<per [RFC 2863]>	<per [RFC 2863]>
ifInOctets	(n)	(n)	(n)	Deprecated	(n)
ifInUCastPkts	(n)	(n)	(n)	Deprecated	(n)
ifInNUCastPkts	Deprecated	Deprecated	Deprecated	Deprecated	Deprecated
ifInDiscards	0	0	0	0	0
ifInErrors	0	0	0	0	0
ifUnknownProtos	0	0	0	0	0
ifOutOctets	(n)	(n)	(n)	(n)	(n)
ifOutUCastPkts	(n)	(n)	(n)	(n)	(n)
ifOutNUCastPkts	Deprecated	Deprecated	Deprecated	Deprecated	Deprecated
ifOutDiscards	0	0	0	0	0
ifOutErrors	0	0	0	0	0
ifOutQlen	Deprecated	Deprecated	Deprecated	Deprecated	Deprecated
ifSpecific	Deprecated	Deprecated	Deprecated	Deprecated	Deprecated

⁵⁵ Columns added per eDOCSIS-N-04.0151-3 by kb 7/18/04.⁵⁶ Column added per eDOCSIS-N-06.0271-2 by kb 7/24/06.⁵⁷ Modified per eDOCSIS-N-06.0343-2 by kb 2/1/07.⁵⁸ Edited per EDOCS-N-03099, 11/11/03, po⁵⁹ Edited per EDOCS-N-03099, 11/11/03, po⁶⁰ Edited per EDOCS-N-03099, 11/11/03, po

5.2.3.2 [RFC 2011] ipNetToMediaTable Requirements

Table 5-3 shows the details of the ipNetToMediaTable entries that MUST be supported by ePS, eMTA, eSTB, and eTEA.

Table 5-3 - [RFC 2011] ipNetToMedia MIB-Object Details for eDOCSIS Device Interfaces

[RFC 2011] MIB-Object details for eCM-eSAFE Interfaces	ePS	eMTA	eSTB-IP ⁶¹	eTEA ⁶²
ipNetToMediaIfIndex	1	16	17	19
ipNetToMediaPhysAddress	WAN-Man MAC Address	MTA MAC Address	STB MAC Address	TEA MAC Address
ipNetToMediaNetAddress	WAN-Man Address, if acquired; otherwise 0.0.0.0	MTA Address, if acquired; otherwise 0.0.0.0	STB IP Address, if acquired; otherwise 0.0.0.0	TEA IP Address, if acquired; otherwise 0.0.0.0
ipNetToMediaType	static(4)	static(4)	static(4)	static(4)

If implemented in an eDOCSIS device, eSAFE elements ePS, eMTA, eSTB, and/or eTEA SHOULD support the ipNetToPhysicalTable [RFC 4293] as described in Table 5-4. The eRouter MUST support the ipNetToPhysicalTable [RFC 4293] as described in Table 5-4.⁶³

Table 5-4 - ipNetToPhysical MIB-Object Details for eDOCSIS Device Interfaces

MIB Object Name	ePS or eRouter	eMTA	eSTB-IP	eTEA
ipNetToPhysicalIfIndex	1	16	17	19
ipNetToPhysicalPhysAddress	WAN-Man MAC Address for the ePS or operator-facing interface MAC Address for the eRouter	MTA MAC Address	STB MAC Address	TEA MAC Address
ipNetToPhysicalNetAddressType	ipv4(1) or ipv6(2), as applicable	ipv4(1) or ipv6(2), as applicable	ipv4(1) or ipv6(2), as applicable	ipv4(1) or ipv6(2), as applicable
ipNetToPhysicalNetAddress	WAN-Man IP Address for the ePS, or eRouter operator-facing interface IP address, if acquired; otherwise a zero-length string	MTA IP Address, if acquired; otherwise a zero-length string	STB IP Address, if acquired; otherwise a zero-length string	TEA IP Address, if acquired; otherwise a zero-length string
ipNetToPhysicalLastUpdated	<refer to RFC 4293>	<refer to RFC 4293>	<refer to RFC 4293>	<refer to RFC 4293>
ipNetToPhysicalType	static(4)	static(4)	static(4)	static(4)
ipNetToPhysicalState	<refer to RFC 4293>	<refer to RFC 4293>	<refer to RFC 4293>	<refer to RFC 4293>
ipNetToPhysicalRowStatus	'active'	'active'	'active'	'active'

⁶¹ Column added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

⁶² Column added per eDOCSIS-N-06.0271-2 by kb 7/24/06.

⁶³ Paragraph and following table added per eDOCSIS-N-06.0343-2 by kb 2/1/07.

Informative Note: If the eSTB is an OpenCable Host, the term "STB MAC Address" in the table above refers to the OpenCable Host MAC Address and not to the CableCARD MAC Address.⁶⁴

5.2.3.3 [RFC 1493] Requirements⁶⁵

The eCM MUST add ports associated with eSAFEs to its [RFC 1493] dot1dBasePortTable.

The eCM MUST support all bridge statistics of the [RFC 1493] dot1dTpPortTable for all ports associated with eSAFEs.

The eCM MUST create a row entry in its dot1dTpFdbTable for each active eSAFE MAC address within the eDOCSIS device. Note that an eSAFE could have more than one active MAC address. In the case of an eCM embedded into a device that contains an OpenCable Host, both the Host and the CableCARD could have active MAC addresses.⁶⁶

Within each dot1dTpFdbTable entry for an eSAFE, the dot1dTpFdbAddress value MUST be the corresponding eSAFE MAC address, the dot1dTpFdbPort value MUST be the port associated with the ifIndex of that eSAFE from the dot1dBasePortTable, and the dot1dTpFdbStatus value MUST be mgmt(5). The eCM MUST prevent row entries for eSAFEs from being aged-out or overwritten.

5.2.3.3.1 [RFC 1493] Requirements for the eSTB

An eDOCSIS device containing an eSTB MUST implement the objects from the [RFC 1493] dot1dStaticTable with a MAX-ACCESS of read-only.

In an eDOCSIS device containing an eSTB, the eCM will acquire the DSG MAC addresses from the eSTB in an implementation-dependant manner. For each DSG MAC address acquired by the eCM, the eCM MUST create a corresponding row entry in the dot1dStaticTable.

For a dot1dStaticTable row entry for a DSG MAC address, the dot1dStaticAddress value MUST be the DSG MAC address, the dot1dStaticReceivePort value MUST be the port associated with ifIndex 2 (CATV-MAC interface) from the dot1dBasePortTable, the dot1dStaticAllowedToGoTo value MUST be the port associated with the ifIndex 18 (interface to the DSG Client of the eSTB) from the dot1dBasePortTable, and the dot1dStaticStatus value MUST be deleteOnReset(4).

Table 5-5 - dot1dStaticTable Entries for DSG MAC Addresses

MIB Object	Value
dot1dStaticAddress	DSG MAC Address
dot1dStaticReceivePort	port associated with ifIndex 2 in dot1dBasePortTable
dot1dStaticAllowedToGoTo	port associated with ifIndex 18 in dot1dBasePortTable
dot1dStaticStatus	deleteOnReset(4)

Each row entry in the dot1dStaticTable describes a bridging rule in which the eCM only bridges a frame with a destination address of the value of dot1dStaticAddress—that is received from the port represented by the value of

⁶⁴ Added this note per eDOCSIS-N-05.0268-2 by GO on 3/23/06.

⁶⁵ Section replaced per eDOCSIS-N-04.0158-2 by kb 7/18/04.

⁶⁶ Revised this paragraph and the first sentence below per eDOCSIS-N-05.0268-2 by GO on 3/23/06.

dot1dStaticReceivePort—if the frame is to be bridged out a port included in the value of dot1dStaticAllowedToGoTo.

An eCM MUST NOT bridge a frame having a destination address equal to an active DSG MAC address if that frame was received from any port other than the one associated with ifIndex 2 (CATV-MAC).

An eCM MUST NOT bridge a frame having a destination address equal to an active DSG MAC address to any port other than the one associated with ifIndex 18 (the interface to the DSG Client of the eSTB).

If a CPE MAC address is acquired by the eCM via the eCM Configuration File or via the address learning process, and the eCM is later informed that the same address is a DSG tunnel MAC address, the eCM SHOULD remove the DSG tunnel MAC address from its list of acquired CPE MAC addresses.⁶⁷

Also, the eCM SHOULD NOT populate a CPE MAC address from the eCM Configuration File into its list of acquired CPE MAC addresses if that MAC address matches that of a DSG tunnel MAC addresses already established via DSG operation.⁶⁸

5.2.3.3.2 [RFC 1493] Requirements for the eTEA⁶⁹

An eCM MUST NOT bridge a frame having a destination address equal to an active eTEA MAC address if that frame was received from any port other than the one associated with ifIndex 19.

An eCM MUST NOT bridge a frame having a destination address equal to an active eTEA MAC address to any port other than the one associated with ifIndex 19 (the interface to the eTEA).

If a CPE MAC address is acquired by the eCM via the eCM Configuration File or via the address learning process, and the eCM is later informed that the same address is an eTEA MAC address, the eCM SHOULD remove the eTEA MAC address from its list of acquired CPE MAC addresses.

5.2.3.4 Battery Backup UPS MIB Requirements⁷⁰

eSAFE specifications can require support for the Battery Backup UPS MIB, if Battery Backup is supported in the containing eDOCSIS device. For more information, please refer to the Battery Backup MIB specification ([CL BB]).

For an eDOCSIS device meeting the requirements specified in [CL BB], the eCM MUST implement the Battery Backup UPS MIB specified in [CL BB].

5.2.4 DHCPv4 Option 43 Syntax Requirements

In order to facilitate device provisioning, all eDOCSIS devices operating with IPv4 will use DHCP Option 43 during registration process for providing vendor class identification, embedded component and vendor specific capability enumerations. Requirements in this section apply only to cable modems operating with IPv4 and do not apply to cable modems not operating with an IPv4 protocol stack, such as a DOCSIS 3.0 or greater cable modem operating with only an IPv6 protocol stack.⁷¹

⁶⁷ Paragraph added per eDOCSIS-N-04.0182-2 by kb 11/2/04.

⁶⁸ Paragraph added per eDOCSIS-N-04.0182-2 by kb 11/2/04.

⁶⁹ Section added per eDOCSIS-N-06.0271-2 by kb 7/25/06.

⁷⁰ Section added per eDOCSIS-N-06.0269-2 by kb 7/24/06.

⁷¹ Paragraph modified per eDOCSIS-N-06.0343-2 by kb 2/1/07.

5.2.4.1 General Requirements

Each eCM DHCP DISCOVER and DHCP REQUEST MUST use Option 43 and its Sub-options 2 through 10 for Vendor Specific Information to identify embedded components as specified in Table 5-6.

Similarly, each eSAFE MAY issue its own DHCP DISCOVER and DHCP REQUEST with Option 43 after eCM has been successfully registered and operational; details are specified in each eSAFE's specification.

5.2.4.2 DHCP Option 43 Syntax

DHCP Option 43 provides device specific information through the use of sub-options. Sub-options 1 through 10 are specified by CableLabs, sub-options 11-127 are reserved for future CableLabs use, and sub-options 128 and above are reserved for vendor use.

The eCM MUST implement the Vendor Specific Information Option (DHCP option 43) as specified in Table 5-6. Details of DHCP option 43 and its sub-options for eDOCSIS are further defined below. The definitions of DHCP Option 43 sub-options MUST conform to requirements imposed by [RFC 2132].

The option begins with a type octet with the value of number 43, followed by a length octet. The length octet is followed by the number of octets of data equal to the value of the length octet. The value of the length octet does not include the two octets specifying the tag and length.

DHCP option 43 in eDOCSIS is a compound option. The content of option 43 is composed of one or more sub-options. Supported DHCP option 43 sub-options in eDOCSIS is in the range 1-254. A sub-option begins with a tag octet containing the sub-option code, followed a length octet which indicates the total number of octets of data. The value of the length octet does not include itself or the tag octet. The length octet is followed by "length" octets of sub-option data.

5.2.4.3 DHCPv4 Option 43 Sub-option Encoding⁷²

The encoding of each Option 43 sub-option is defined below. See Table 5-6 for the intended purpose of each sub-option.

The eCM MAY include Option 43 sub-option 1 in DHCPDISCOVER and DHCPREQUEST messages. If DHCP Option 43 sub-option 1 is included in these DHCP client messages, the eCM MUST encode this sub-option by the number of octets equal to the value of the length octet of this sub-option, with each octet codifying a requested sub-option. If the length octet of this sub-option is 0 (because there are no requested sub-options), this sub-option SHOULD be omitted from DHCP Option 43.⁷³

The eCM MUST encode each of the DHCP Option 43 sub-options 2, 3, 4, 5, 6, 7, 8, 9 and 10 as a character string consisting of characters from the NVT ASCII character set, with no terminating NULL.

An eCM MUST send DHCP Option 43 sub-option 2 containing the character string "ECM" (without the quotation marks).

An eCM MUST send DHCP Option 43 sub-option 3 containing a colon-separated list of all eSAFE types in the eDOCSIS device, including at a minimum the colon-separated character string "ECM:<eSAFE>" (without the quotation marks).

⁷² Revised this section per eDOCSIS-N-06.0279-3 by GO on 10/4/06.

⁷³ Paragraph modified per eDOCSIS-N-04.0123-2 and eDOCSIS-N-04.0134-2 by kb 7/18/04.

Defined eSAFEs are: "EPS" for CableHome embedded Portal Services Element, "EMTA" for PacketCable embedded MTA, "ESTB" for embedded set-top box, and "ETEA" for embedded TDM emulation adapter.⁷⁴

An eCM MUST send DHCP Option 43 sub-option 4 containing the device serial number as in MIB object docsDevSerialNumber.

An eCM MUST send DHCP Option 43 sub-option 5 containing the Hardware version number, identical to the value as reported in <Hardware version> field in MIB object sysDescr.

An eCM MUST send DHCP Option 43 sub-option 6 containing the Software version number, identical to the value as reported in <Software version> field in MIB object sysDescr.

An eCM MUST send DHCP Option 43 sub-option 7 containing the Boot ROM version number, identical to the value as reported in <Boot ROM version> field in MIB object sysDescr.

An eCM MUST send DHCP Option 43 sub-option 8 containing a 6-octet⁷⁵, hexadecimally-encoded, vendor-specific Organization Unique Identifier (OUI) that uniquely identifies the eCM manufacturer. A vendor MAY use the same OUI as in the eCM's MAC address, and MAY use a single OUI to identify all its eDOCSIS products.

An eCM MUST send DHCP Option 43 sub-option 9 containing the Model number, identical to the value as reported in <Model number> field in MIB object sysDescr.

An eCM MUST send DHCP Option 43 sub-option 10 containing the Vendor name, identical to the value as reported in <Vendor name> field in MIB object sysDescr.

If an eCM is embedded with one or more eSAFEs that utilize eCM Config File Encapsulation, the eCM MUST send DHCP Option 43 sub-option 15 containing the list of eSAFEs that support this feature.

If an eCM is embedded in a device containing an eSTB, the eCM MUST send DHCP Option 43 sub-option 18 containing the type of video security element in the device.⁷⁶

In eDOCSIS, DHCP Option 43 sub-options 11-127 are reserved for eSAFEs and CableLabs, and MUST NOT be used for other purposes.

In eDOCSIS, DHCP Option 43 sub-options 128-254 are reserved for vendors and MAY be used by vendors.

If the total number of octets in all DHCP Option 43 sub-options exceeds 255 octets, the eCM MUST follow [RFC 3396] to split the option into multiple smaller options.

⁷⁴ Paragraph modified per eDOCSIS-N-04.0151-3 by kb 7/18/04.

⁷⁵ Changed from 3 to 6 by eDOCSIS-N-04.0123-2 by kb 7/30/04.

⁷⁶ Paragraph added per eDOCSIS-N-06.0355-2 by kb on 2/1/07.

Table 5-6 - DHCP Option 43 Syntax⁷⁷

eCM DHCP Option 43	Value	Description
Sub-option 1		The request sub-option vector is a list of sub-options (within option 43) to be returned to client by the server upon reply to the request. None defined.
Sub-option 2	"ECM"	Device type of the component making the DHCP request. For DOCSIS, this is: "ECM"= embedded Cable Modem (as specified by DOCSIS 1.0, 1.1, 2.0, or 3.0 Base Specifications)
Sub-option 3 ⁷⁸	"ECM: <eSAFE ₁ :eSAFE ₂ ... SAFE _n >"	Colon-separated list of eCM and eSAFE(s) contained in the complete eDOCSIS device. First on the list MUST be "ECM" for eCM. <eSAFE _x > can be "EMTA", "EPS", "EROUTER", "ESTB", or "ETEA" corresponding to embedded MTA, embedded Portal Services Element, embedded Router, embedded STB, and embedded TDM Emulation Adapter, respectively. ⁷⁹ For example: "ECM:EMTA" = A PacketCable/Embedded MTA "ECM:EPS" = A CableHome/Embedded Portal Services Element "ECM:EROUTER" = A DOCSIS Embedded Router "ECM:ESTB" = An Embedded STB "ECM:ETEA" = An Embedded TEA "ECM:EMTA:EPS" = An Embedded MTA and Embedded Portal Services Element
Sub-option 4	"<device serial number>"	Device serial number as in MIB object docsDevSerialNumber e.g., "123456"
Sub-option 5	"<Hardware version>"	Hardware version number. Identical to value as reported in the <Hardware version> field in MIB object sysDescr. e.g., "v.3.2.1"
Sub-option 6	"<Software version>"	Software version number. Identical to value as reported in the <Software version> field in MIB object sysDescr. e.g., "v.1.0.2"
Sub-option 7	"<Boot ROM version>"	Boot ROM version. Identical to value as reported in the <Boot ROM version> field in MIB object sysDescr. e.g., "Bv4.5.6"
Sub-option 8	"<OUI>"	A 6-octet, hexadecimally-encoded, vendor-specific Organization Unique Identifier (OUI) that may match the OUI in eCM's MAC address. ⁸⁰
Sub-option 9	"<Model number>"	Device model number. Identical to value as reported in the <Model number> field in MIB object sysDescr. e.g., "T3000"
Sub-option 10	"<Vendor name>"	Vendor name or ID. Identical to value as reported in the <Vendor name> field in MIB object sysDescr. e.g., "XYZ Corp"

⁷⁷ Revised this table per eDOCSIS-N-06.0279-3 by GO on 10/4/06, and per eDOCSIS-N-06.0343-2 by kb 2/2/07.⁷⁸ Modified per eDOCSIS-N-04.0151-3 by kb 7/18/04.⁷⁹ ETEA added per eDOCSIS-N-06.0271-2 by kb 7/25/06.⁸⁰ Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

eCM DHCP Option 43	Value	Description
Sub option 15	"<eSAFE1:eSAFE2 ... SAFEn>"	Colon-separated list of eSAFEs contained in the eDOCSIS device that supports eCM Config File Encapsulation. The list could contain "EMTA", "EPS", "ESTB", "ETEA" or "EROUTER". The requirements for support of eCM Config File Encapsulation by each eSAFE type (and hence the requirements for the contents of this sub-option), can be found in the relevant eSAFE specification. If no eSAFE supports eCM Config File Encapsulation, then the eCM MUST either not populate this sub-option, or set the sub-option length to zero. For example: "ESTB" = An Embedded STB with eCM eSAFE config file TLV support "" (or absence of sub-option 15) = no eSAFE supports the eCM eSAFE config file TLV
Sub-option 18 ⁸¹	"<VideoSecurityElement>"	Video Security Type Only present if the device contains an eSTB. This sub-option takes one of the following values: "CARD" corresponds to an eSTB with a CableCARD Device as its security element. "SM" corresponds to an eSTB with a Secure Microprocessor as its security element. "EMBED" corresponds to an embedded security eSTB.

5.2.4.4 Examples (Informative)

5.2.4.4.1 DOCSIS Cable Modem with Embedded PacketCable 1.0 MTA Example

Table 5-7 shows the syntax for DHCP Option 43 for the eCM in an E-MTA.

Table 5-7 - Example eDOCSIS Device: E-MTA

DHCP DISCOVER Options	Value	Description
eCM DHCP DISCOVER		
eCM Option 43 sub-option 1	N/A (omitted because the list is empty) ⁸²	List of sub-options (within option 43) to be returned by server
eCM Option 43 sub-option 2	"ECM"	Embedded cable modem
eCM Option 43 sub-option 3	"ECM:EMTA"	ECM followed by a list of embedded components (eSAFEs)
eCM Option 43 sub-option 4	"123456"	Device serial number as in MIB object docsDevSerialNumber
eCM Option 43 sub-option 5	"V1.2.3"	Hardware version number as in <Hardware version> field in MIB object sysDescr.
eCM Option 43 sub-option 6	"V3.2.1"	Software version number as in <Software version> field in MIB object sysDescr
eCM Option 43 sub-option 7	"Boot 4.5.6"	Boot ROM version number as in <Boot ROM version> field in MIB object sysDescr
eCM Option 43 sub-option 8	"0204DF"	6-octet OUI as Vendor ID ⁸³
eCM Option 43 sub-option 9	"Xman200"	Device model number as in <Model number> field in MIB object sysDescr

⁸¹ Row added per eDOCSIS-N-06.0355-2 by kb on 2/1/07.

⁸² Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

⁸³ Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

DHCP DISCOVER Options	Value	Description
eCM Option 43 sub-option 10	"XYZ Broadband"	Vendor name as in <Vendor name> field in MIB object sysDescr

5.2.4.4.2 DOCSIS Cable Modem with Embedded CableHome 1.1 PS Example

Table 5-8 shows the syntax for DHCP Options 43 for the eCM in a CableHome 1.1 E-PS device.

Table 5-8 - Example eDOCSIS Device: DOCSIS 1.1 CableHome/E-PS

DHCP DISCOVER Options	Value	Description
eCM DHCP DISCOVER		
eCM Option 43 sub-option 1	N/A (omitted because the list is empty) ⁸⁴	List of sub-options (within option 43) to be returned by server
eCM Option 43 sub-option 2	"ECM"	Embedded cable modem
eCM Option 43 sub-option 3	"ECM:EPS"	ECM followed by a list of embedded components (eSAFEs)
eCM Option 43 sub-option 4	"123456"	Device serial number as in MIB object docsDevSerialNumber
eCM Option 43 sub-option 5	"V1.2.3"	Hardware version number as in <Hardware version> field in MIB object sysDescr.
eCM Option 43 sub-option 6	"V3.2.1"	Software version number as in <Software version> field in MIB object sysDescr
eCM Option 43 sub-option 7	"Boot 4.5.6"	Boot ROM version number as in <Boot ROM version> field in MIB object sysDescr
eCM Option 43 sub-option 8	"0204DF"	6-octet OUI as Vendor ID ⁸⁵
eCM Option 43 sub-option 9	"Xman200"	Device model number as in <Model number> field in MIB object sysDescr
eCM Option 43 sub-option 10	"XYZ Broadband"	Vendor name as in <Vendor name> field in MIB object sysDescr

5.2.4.4.3 DOCSIS Cable Modem with Embedded STB Example⁸⁶

Table 5-9 illustrates the syntax for DHCP Options 43 for the eCM with an embedded STB.

Table 5-9 - Example eDOCSIS Device: DOCSIS 1.1 Embedded STB⁸⁷

DHCP DISCOVER & REQUEST Options	Options Value	Description
eCM DHCP DISCOVER & REQUEST		
eCM Option 43 sub-option 1	N/A (omitted because the list is empty) ⁸⁸	List of sub-options (within option 43) to be returned by server.

⁸⁴ Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

⁸⁵ Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

⁸⁶ Section added per eDOCSIS-N-04.0151-3 by kb 7/18/04.

⁸⁷ Revised this table per eDOCSIS-N-06.0279-3 by GO on 10/4/06.

⁸⁸ Options Value and Description revised per eDOCSIS-N-04.0169-1 by kb 11/1/04.

DHCP DISCOVER & REQUEST Options	Options Value	Description
eCM Option 43 sub-option 2	"ECM"	Device type of the entity making the DHCP request. For DOCSIS, this is: "ECM" = embedded Cable Modem (as specified by DOCSIS 1.0, 1.1, or 2.0 Base Specifications)
eCM Option 43 sub-option 3	"ECM:ESTB"	Colon-separated list of eCM and eSAFE(s) contained in the device. First on the list MUST be "ECM". "ECM" = embedded CM "ESTB" = embedded STB
eCM Option 43 sub-option 4	e.g., "123456"	Device serial number from MIB object docsDevSerialNumber
eCM Option 43 sub-option 5	e.g., "V1.2.3"	Hardware version number from <Hardware version> field in MIB object sysDescr.
eCM Option 43 sub-option 6	e.g., "V3.2.1"	Software version number from <Software version> field in MIB object sysDescr
eCM Option 43 sub-option 7	"Boot 4.5.6"	Boot ROM version number from <Boot ROM version> field in MIB object sysDescr
eCM Option 43 sub-option 8	"0204DF"	A 6-octet, hexadecimally-encoded, vendor-specific Organization Unique Identifier (OUI) that may match the OUI in the eCM's MAC address.
eCM Option 43 sub-option 9	"Xman200"	Device model number from <Model number> field in MIB object sysDescr
eCM Option 43 sub-option 10	"XYZ Broadband"	Vendor name as in <Vendor name> field in MIB object sysDescr
eCM Option 43 sub-option 15	"ESTB"	eSTB supports eCM eSAFE Config file TLVs
eCM Option 43 sub-option 18 ⁸⁹	"EMBED"	This device contains an embedded security eSTB.

5.2.4.4.4 DOCSIS Cable Modem with Embedded PacketCable MTA and CableHome PS

Table 5-10 shows the syntax for DHCP Option 43 for the eCM in an eDOCSIS device that contains the following embedded components: a DOCSIS 2.0 eCM, a PacketCable 1.0 eMTA and a CableHome 1.1 ePS.

Table 5-10 - Example eDOCSIS Device Containing DOCSIS 2.0 eCM, eMTA and ePS

DHCP DISCOVER Options	Value	Description
eCM DHCP DISCOVER		
eCM Option 43 sub-option 1	N/A (omitted because the list is empty) ⁹⁰	List of sub-options (within option 43) to be returned by server
eCM Option 43 sub-option 2	"ECM"	Embedded cable modem
eCM Option 43 sub-option 3	"ECM:EMTA:EPS"	ECM followed by a list of embedded components (eSAFEs)
eCM Option 43 sub-option 4	"123456"	Device serial number as in MIB object docsDevSerialNumber
eCM Option 43 sub-option 5	"V1.2.3"	Hardware version number as in <Hardware version> field in MIB object sysDescr.

⁸⁹ Row added per eDOCSIS-N-06.0355-2 by kb on 2/1/07.

⁹⁰ Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

DHCP DISCOVER Options	Value	Description
eCM Option 43 sub-option 6	"V3.2.1"	Software version number as in <Software version> field in MIB object sysDescr
eCM Option 43 sub-option 7	"Boot 4.5.6"	Boot ROM version number as in <Boot ROM version> field in MIB object sysDescr
eCM Option 43 sub-option 8	"0204DF"	6-octet OUI as Vendor ID ⁹¹
eCM Option 43 sub-option 9	"Xman200"	Device model number as in <Model number> field in MIB object sysDescr
eCM Option 43 sub-option 10	"XYZ Broadband"	Vendor name as in <Vendor name> field in MIB object sysDescr ⁹²

5.2.4.4.5 DOCSIS Cable Modem with Embedded TEA⁹³

Table 5-11 shows the syntax for DHCP Option 43 for the eCM with an embedded TEA.

Table 5-11 - Example eDOCSIS Device: DOCSIS 1.1 TEA

DHCP DISCOVER Options	Value	Description
eCM DHCP DISCOVER		
eCM Option 43 sub-option 1	N/A (omitted because the list is empty)	List of sub-options (within option 43) to be returned by server
eCM Option 43 sub-option 2	"ECM"	Embedded cable modem
eCM Option 43 sub-option 3	"ECM:ETEA"	ECM followed by a list of embedded components (eSAFEs)
eCM Option 43 sub-option 4	"123456"	Device serial number as in MIB object docsDevSerialNumber
eCM Option 43 sub-option 5	"V1.2.3"	Hardware version number as in <Hardware version> field in MIB object sysDescr.
eCM Option 43 sub-option 6	"V3.2.1"	Software version number as in <Software version> field in MIB object sysDescr
eCM Option 43 sub-option 7	"Boot 4.5.6"	Boot ROM version number as in <Boot ROM version> field in MIB object sysDescr
eCM Option 43 sub-option 8	"0204DF"	6-octet OUI as Vendor ID
eCM Option 43 sub-option 9	"Xman200"	Device model number as in <Model number> field in MIB object sysDescr
eCM Option 43 sub-option 10	"XYZ Broadband"	Vendor name as in <Vendor name> field in MIB object sysDescr

5.2.4.4.6 DOCSIS Cable Modem with Embedded Router⁹⁴

Table 5-12 shows the syntax for DHCP Option 43 for the eCM with an embedded router.

⁹¹ Modified per eDOCSIS-N-04.0123-2 by kb 7/18/04.

⁹² Edited per eDOCSIS-N-03084, 11/11/03, po

⁹³ Section added per eDOCSIS-N-06.0271-2 by kb 7/25/06.

⁹⁴ Section added per eDOCSIS-N-06.0343-2 by kb 2/2/07.

Table 5-12 - DOCSIS Cable Modem with Embedded Router

DHCP DISCOVER Options	Value	Description
eCM DHCP DISCOVER		
eCM Option 43 sub-option 1	N/A (omitted because the list is empty)	List of sub-options (within option 43) to be returned by server
eCM Option 43 sub-option 2	"ECM"	Embedded cable modem
eCM Option 43 sub-option 3	"ECM:EROUTER"	ECM followed by a list of embedded components (eSAFEs)
eCM Option 43 sub-option 4	"123456"	Device serial number as in MIB object docsDevSerialNumber
eCM Option 43 sub-option 5	"V1.2.3"	Hardware version number as in <Hardware version> field in MIB object sysDescr
eCM Option 43 sub-option 6	"V3.2.1"	Software version number as in <Software version> field in MIB object sysDescr
eCM Option 43 sub-option 7	"Boot 4.5.6"	Boot ROM version number as in <Boot ROM version> field in MIB object sysDescr
eCM Option 43 sub-option 8	"0204DF"	6-octet OUI as Vendor ID
eCM Option 43 sub-option 9	"Xman200"	Device model number as in <Model number> field in MIB object sysDescr
eCM Option 43 sub-option 10	"XYZ Broadband"	Vendor name as in <Vendor name> field in MIB object sysDescr
eCM Option 43 sub-option 15	"EROUTER"	eRouter supports eCM eSAFE Config file TLVs

5.2.5 DHCPv6 Vendor Specific Option Syntax Requirements⁹⁵

In order to facilitate provisioning, all eDOCSIS devices implementing a DOCSIS 3.0 or greater CM and operating with IPv6 will include Vendor-specific Information options during the CM IPv6 registration process [MULPI]. Vendor-specific Information options include configuration file location and name information, syslog server information, device identifier information, and cable modem capabilities. Refer to [CANN-DHCP].

5.2.5.1 eDOCSIS Device Information in DHCPv6 Vendor Specific Options

An eCM operating with IPv6 provides device-specific information through the use of the DHCPv6 Vendor Specific Information Options. This information, which is carried in Option 43 sub-options in the case of an eCM or eSAFE using IPv4, provides the provisioning system with details about the eDOCSIS device, including implemented CableLabs specification, hardware revision, software revision, and number and type of implemented eSAFEs. Refer to Section 5.2.4.3 for more information about DHCPv4 Option 43 requirements.

An eCM operating with IPv6 **MUST** include the DHCPv6 Vendor Specific option codes listed below in DHCPv6 Solicit messages:

- Option Code 2: Embedded Cable Modem Identifier
- Option Code 3: List of Implemented eSAFEs
- Option Code 4: Device Serial Number
- Option Code 5: Hardware Version Number
- Option Code 6: Software Version Number


⁹⁵ Section added per e-DOCSIS-N-06.0343-2 by kb 2/2/07.

- Option Code 9: Model Number
- Option Code 10: Vendor Identifier

The format of the DHCPv6 vendor specific option codes 2 – 6 and 9 – 10 listed above generally follow the format of other vendor specific options described in [CANN-DHCP]. The specific format of each of the required Option Codes listed above is described below.

Option Code 2: Embedded Cable Modem Identifier

Option code 2 contains the string ECM, indicating to the provisioning system that the DHCP client is implemented on an embedded cable modem.

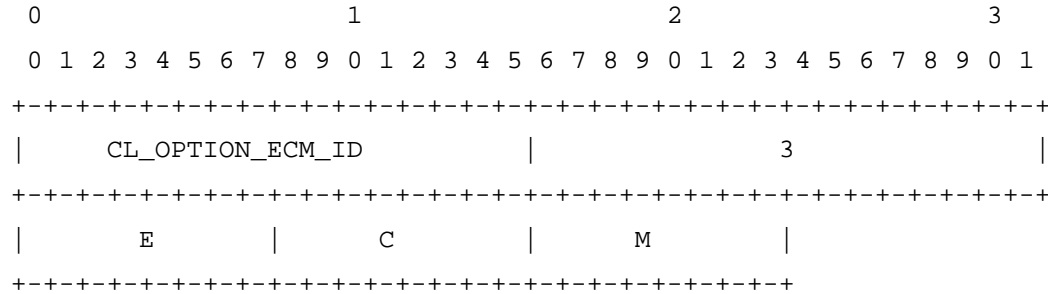

Option Code 3: List of Implemented eSAFEs

This option is a colon-separated list of eSAFEs implemented in the eDOCSIS device. The CM MUST list in the List of Implemented eSAFEs option the abbreviation for each eSAFE implemented in the device, beginning with ECM and separated with a colon. Defined eSAFE abbreviations are listed in the Description field for DHCPv4 Option 43, sub-option 3 in Table 5-6.



```

|
+-----+

```

An example of the List of Implemented eSAFEs for a hypothetical product implementing an eCM, eMTA, and eSTB follows:

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+
|          3          |          0x0E          |
+-----+
|          E          |          C          |          M          |          :          |
+-----+
|          E          |          M          |          T          |          A          |
+-----+
|          :          |          E          |          S          |          T          |
+-----+
|          B          |          :          |
+-----+

```

Option Code 4: Device Serial Number

The Device Serial Number option contains the eDOCSIS device's serial number.

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+
| CL_OPTION_DEVICE_SERIAL_NUMBER |          option-len          |
+-----+
|          Serial Number          |
|          ...          |
+-----+

```

Option Code 5: Hardware Version Number

The Hardware Version Number option contains the eDOCSIS device's hardware version number.

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+
| CL_OPTION_HARDWARE_VERSION_NUMBER |          option-len          |
+-----+
|          Hardware Version Number          |

```

```

|                                     ...                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Option Code 6: Software Version Number

The Software Version Number option contains the vendor-assigned version number of the software implemented in the device.

```

0           1           2           3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| CL_OPTION_SOFTWARE_VERSION_NUMBER | option-len |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Software Version Number                                     |
|                                     ...                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Option Code 9: Device Model Number

The Device Model Number option contains the model number of the eDOCSIS device.

```

0           1           2           3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| CL_OPTION_MODEL_NUMBER | option-len |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Hardware Version Number                                     |
|                                     ...                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Option Code 10: Vendor Identifier

The Device Vendor Identifier option contains the name or other identifier of the vendor who manufactured and/or sells the eDOCSIS device.

```

0           1           2           3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| CL_OPTION_VENDOR_OUI | option-len |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Vendor Identifier                                     |
|                                     ...                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

The eCM Config File Encapsulation option indicates the list of eSAFE devices that supports this feature.

[illegible]

In order to verify conformance to this specification and to the DOCSIS Base Specifications, a mechanism to generate and receive traffic bridged through the eCM is required. eDOCSIS devices that have a physically exposed CMCI (e.g., 10BaseT or USB) can be tested by using external packet generation equipment connected to that interface.

Additionally, an eDOCSIS device MAY have multiple eSAFEs, each with a logical CPE interface (LCI) to the eCM. This specification places requirements on the LCIs as well as the bridging of traffic among eCM and eSAFEs.

To this end, a Software Loopback for eDOCSIS (SLED) is specified below.

An eCM **SHOULD** implement SLED. An eCM without an externally accessible CMCI port, or a physical interface configured to be equivalent to a CMCI port, **MUST** implement SLED.

5.2.6.2.1 General Description

The SLED test functions are controlled via SLED MIB objects as specified in Annex A. The SLED MIB objects MUST be associated with the SNMP stack of the eCM. The SLED MIB objects MUST NOT be accessible through the CMCI.

⁹⁶ Section added per EDOCS-N-03088 11/17/03

To prevent unintended activation of SLED, all SLED functions **MUST** be disabled by default. SLED functions **MUST** only be enabled if the MIB object *sledGlobalEnable* is set to 'true' prior to eCM registration; *sledGlobalEnable* **MAY** be set to 'true' via inclusion in TLV-11 of the eCM's configuration file.

The SLED MIB values revert to power-on values when the CM de-registers or loses Operational state; the *sledGlobalEnable* will revert to 'false' and in-progress packet generation or loopback will be stopped.⁹⁷

Figure 5-15 illustrates the SLED reference model.

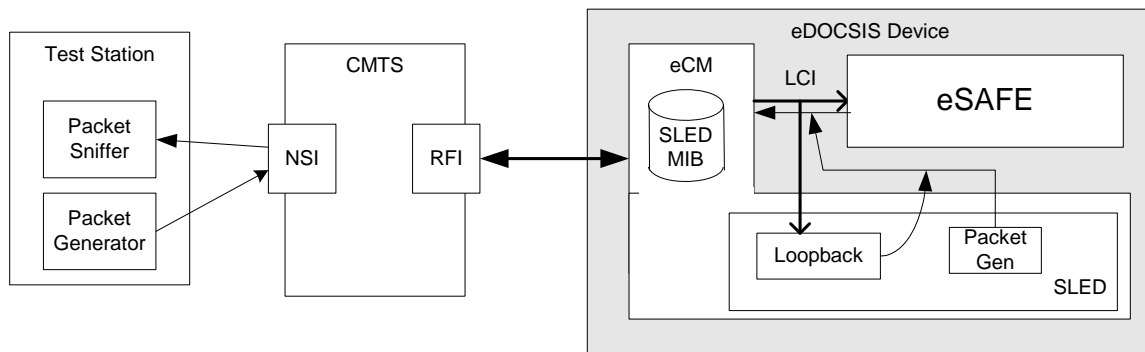


Figure 5-15 - SLED Reference Model

The SLED functionality supports:

1. **Packet loopback**—The primary purpose of the Packet loopback protocol is to enable verification of the receipt of packets across the LCI by the eSAFE. Once enabled by the SLED MIB object, all packets that are forwarded to the indicated LCI are encapsulated into a pre-defined packet header (Ethernet DIX frame header + IP header + UDP header) and reflected back across the LCI to the eCM for forwarding to the final destination. Typically, the looped-back packets will be addressed to, and captured by, a test station residing in the Network-Side Interface (NSI) of the CMTS.
2. **Packet generation**—SLED MIB objects are defined to enable setting up of Ethernet framing and payload transmission for packet generation and transmission through the LCI to the eCM. The SLED MIB objects described below control the packet transmission with parameters such as Ethernet packet header, packet rate, and the number of packets.
3. Packet loopback and packet generation SLED functions **MUST** be able to be controlled independently.
4. The packet loopback and packet generation SLED functions **MUST NOT** disrupt network connectivity to or from the eSAFE. When SLED loopback is enabled, a packet transmitted across the LCI in the eCM-to-eSAFE direction, **MUST** be forwarded to both the eSAFE and the SLED loopback function. When SLED functions are enabled, packets to/from the eSAFE **MUST** continue to be bridged across the LCI.

5.2.6.2.2 Loopback Protocol

An eCM implementing SLED **MUST** implement the following loopback protocol:

1. The SLED packet loopback function is attached to the LCI associated with the eSAFE by setting SLED MIB *sledLoopbackInterface* to the eCM's ifIndex number associated with the LCI (per Table 5-1).

⁹⁷ Paragraph added per eDOCSIS-N-04.0122-2 by kb 7/18/04.

2. The SLED MIB object *sledLoopbackPktHdr* is configured with the 42-byte loopback Ethernet packet/IP/UDP headers (14-byte Ethernet header + 20-byte IPv4 header + 8-byte UDP header).
3. As an example, the following loopback header parameters could be used:
 - a. Ethernet MAC source address = eSAFE MAC address
 - b. Ethernet MAC destination address = test station MAC address
 - c. IP source address = eSAFE Management IP address
 - d. IP destination address= test station IP address
 - e. UDP source port number = 7
 - f. UDP destination port number =7
4. When the SLED MIB object *sledLoopbackInterface* is set to an *ifIndex* associated with an LCI which supports SLED, *sledLoopbackPktHdr* contains a 42-byte octet string, and *sledLoopbackEnable* is set to 'true', the SLED MUST operate in a loopback mode.
5. When operating in loopback mode, all Ethernet packets forwarded across the indicated LCI by the eCM will be processed as follows⁹⁸:
 - a. If the received Ethernet packet is greater than 1472 octets, the Ethernet packet MUST be split into two fragments according to IP fragmentation scheme as described in [RFC 791], the first consisting of the first 1472 octets of the Ethernet packet and the second containing the remaining octets, resulting in two payloads to that are processed as described below.
 - b. If the received Ethernet packet is less than or equal to 1472 octets, the entire packet MUST be processed as a single payload.
 - c. Each payload generated in step 5a or 5b MUST be prepended with the contents of *sledLoopbackPktHdr*.
 - d. The mutable fields within *sledLoopbackPktHdr* MUST be recomputed. The mutable fields are IP Header Checksum, IP Total Length per [RFC 791], and UDP Checksum, UDP Length per [RFC 768].
 - e. If the Ethernet packet is fragmented as defined in step 5a, the appropriate IP header fields MUST be updated to indicate IP fragmentation. The IP fragmentation header values will differ depending on if this is the first or second fragment being processed (per [RFC 791]). Further, the final 8-bytes of *sledLoopbackPktHdr* (the UDP header) MUST NOT be prepended to the second fragment.
 - f. The Ethernet FCS MUST be computed and appended.
 - g. The resulting Ethernet packet MUST be transmitted to the LCI toward the eCM.
6. When the SLED MIB object *sledLoopbackEnable* is set to 'false', the SLED loopback function MUST be disabled.
7. While the SLED loopback function is enabled, the eCM MUST reject changes to *sledLoopbackInterface* or *sledLoopbackPktHdr*.

Figure 5-16 illustrates the SLED packet loopback encapsulation.⁹⁹

⁹⁸ Note: The eCM MUST remove the Ethernet FCS/CRC32 before encapsulating and processing the packet for loopback. Because the CRC32 may not be present, may be incorrect, and is not relevant to the SLED loopback tests, it is omitted from the packet that is looped back. Note added per eDOCSIS-N-04.0122-2 by kb 7/18/04.

⁹⁹ Figure modified per eDOCSIS-N-04.0122-2 by kb 7/18/04.

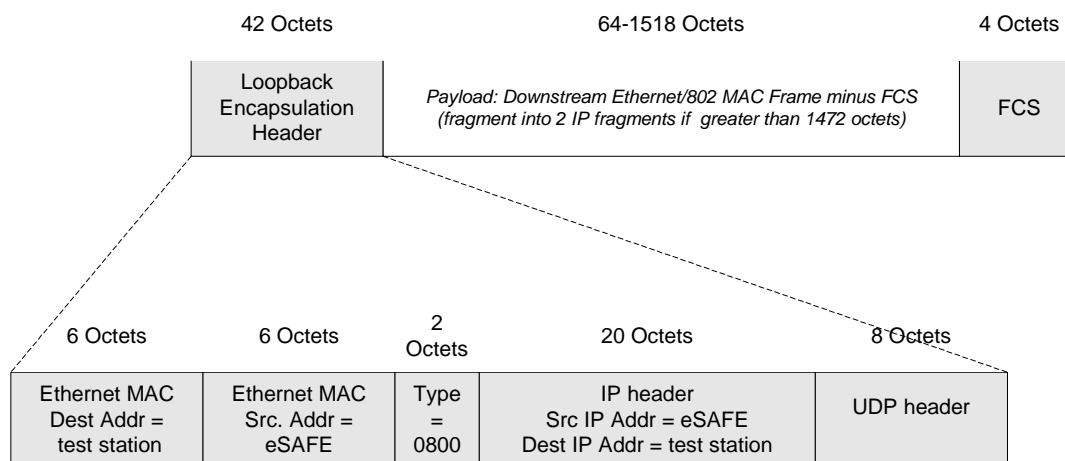


Figure 5-16 - SLED Packet Loopback Encapsulation

Figure 5-17 illustrates an example of the SLED loopback sequence.

5.2.6.2.3 Packet Generation Protocol

An eDOCSIS device implementing SLED MUST implement the following packet generator protocol:

1. The SLED packet generation function is attached to the eCM's LCI associated with the eSAFE by setting SLED MIB sledPktGenInterface to the ifIndex number associated with the LCI (per Table 5-1).
2. The SLED MIB object sledPktGenPayload is set up to be a complete Ethernet (DIX/802 MAC) packet, including FCS trailer, for transmission across the LCI. The FCS is set to be correct for the packet as specified, and MAY be recalculated by the eCM as required for upstream processing; the SLED is not required to validate the FCS, and a packet with an invalid FCS MAY be transmitted with a corrected FCS.
3. The SLED MIB objects sledPktGenRate and sledPktGenNumPkts are set to non-zero values.
4. When sledPktGenInterface is set to an ifIndex associated with an LCI which supports SLED, sledPktGenRate and sledPktGenNumPkts are both set to non-zero values, the SLED Packet Generator MUST start to send generated Ethernet packets to the LCI in within 250 msec after sledPktGenTrigger is set to 'start'; the SLED SHOULD start to transmit packets to the LCI as soon as possible in order to minimize the amount of time it takes to run tests that use the SLED Packet Generator.
5. When sledPktGenTrigger is set to 'start', the SLED Packet Generator MUST set the SLED MIB sledPktGenLastTrigger to the current value of the system MIB sysUptime.
6. The packets generated by the SLED Packet Generator MUST be the exact copies of the Ethernet packet specified by the SLED MIB sledPktGenPayload. The average rate of generated packets MUST be as specified by the SLED MIB sledPktGenRate.
7. The packet generation MUST be continued until the total number of generated packets reaches the limit as specified by the SLED MIB sledPktGenNumPkts, unless terminated by setting sledPktGenTrigger to 'stop'. If sledPktGenTrigger is set to 'stop' while packets are being generated, the SLED SHOULD stop packet generation within 1 second.
8. While the previous sequence of SLED packets is still in progress, the eCM MUST reject changes to sledPktGenInterface, sledPktGenPayload, sledPktGenNumPkts or sledPktGenRate.

Refer to Figure 5-17 for an illustration of the SLED packet loopback and generation sequences.

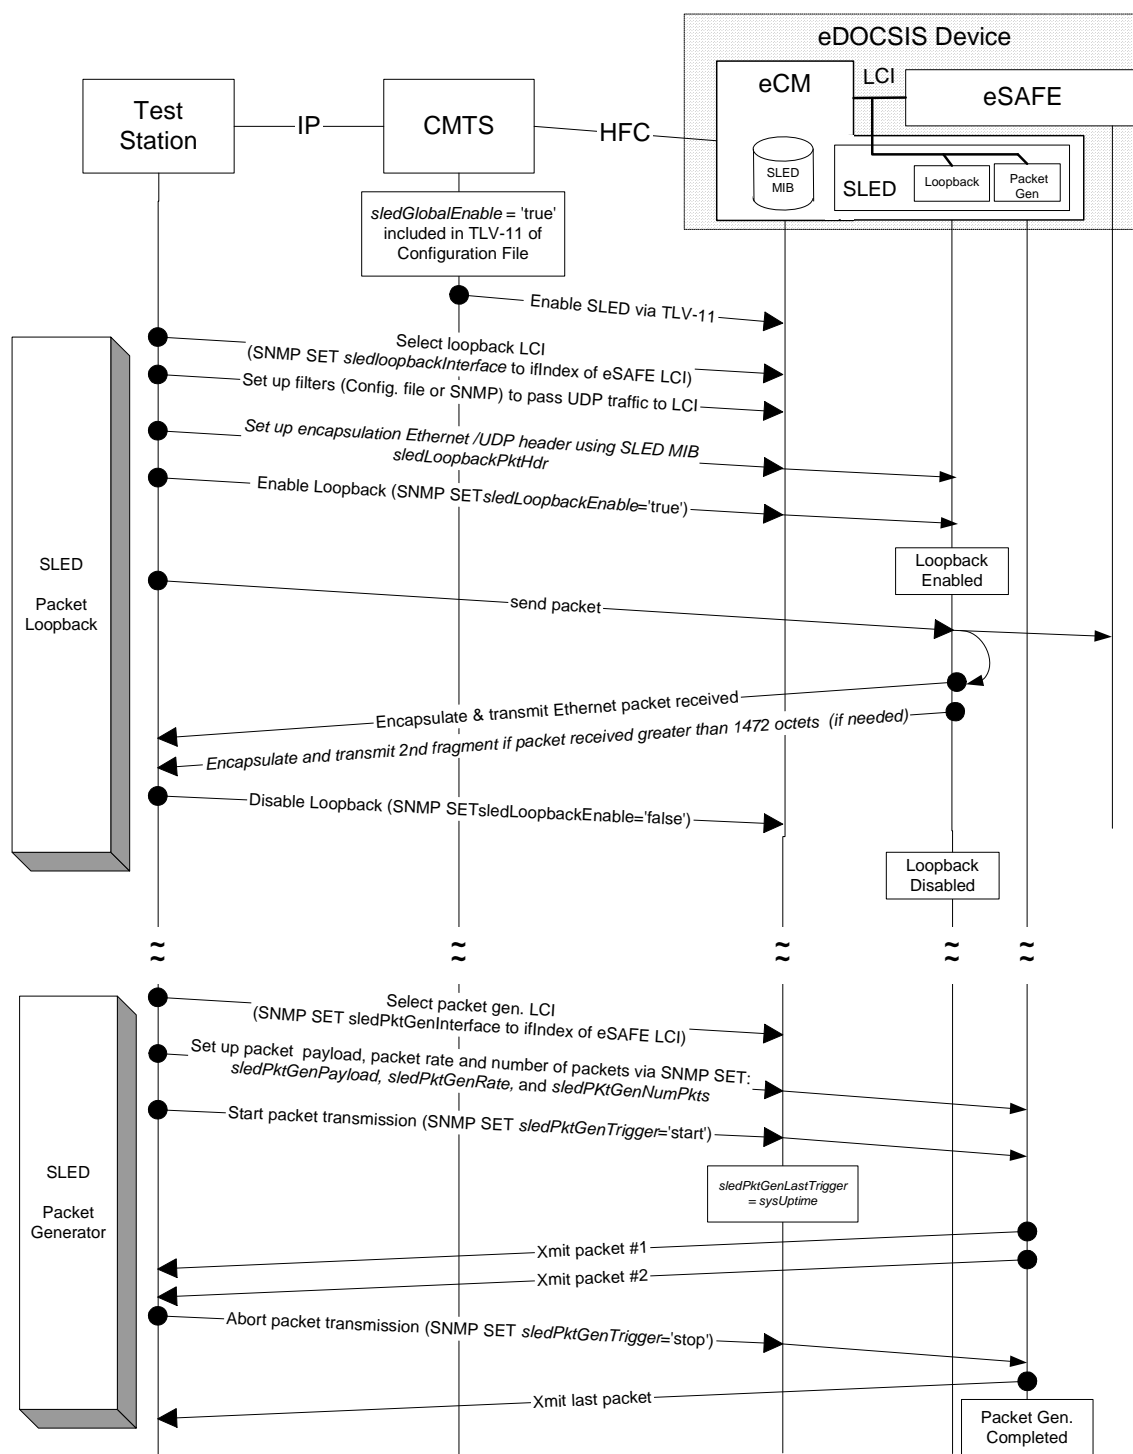


Figure 5-17 - SLED Packet Loopback And Generation Sequences

5.2.7 Firmware Download¹⁰⁰

All eDOCSIS devices MUST support a single secured firmware image download that is used for the entire eDOCSIS device.

With the exception of eDOCSIS devices that contain eSTBs, the download MUST be controlled by the eCM using the DOCSIS Secure Software Download (SSD) mechanisms as specified in [BPI+], [DOCSIS RFI], and [DOCSIS OSS].

Firmware download for an eDOCSIS device that contains an eSTB (referred to as a Set-top Device) is defined in the following subsection.

5.2.7.1 Set-top Device Firmware Download¹⁰¹

There are two firmware download methods for an eDOCSIS device that contains an eSTB:

1. DSM-CC data carousel methods as defined in the CableCARD Interface 2.0 specification [CCIF 2.0],
2. DOCSIS Secure Software Download (SSD) mechanisms as defined in [BPI+], [DOCSIS RFI], and [DOCSIS OSS].

Note that OpenCable Host 2.0 Set-top devices support the above firmware download methods as specified in [HOST2.0] and [CCIF 2.0].

All other Set-top Devices that do not comply with [HOST2.0] MUST support at least one of 1) all the DSM-CC Data Carousel methods [CCIF 2.0], and 2) the DOCSIS SSD method.

Firmware downloads can be triggered either via the eCM or the eSTB depending upon implementation. When a Set-top Device firmware download is triggered via the eCM logical element, the eCM MUST report the status of the firmware download as described in Section 5.2.7.1.1. When a Set-top Device firmware download is triggered via the eSTB logical element, the eCM MUST report the status of the firmware download as indicated in Section 5.2.7.1.2.

5.2.7.1.1 OSS Requirements for Firmware Downloads Initiated by the eCM

If the Set-top Device supports DOCSIS SSD, then it MUST report the status of a firmware download initiated by the eCM in accordance with the CM requirements in [DOCSIS OSS].

If the Set-top Device does not implement DOCSIS SSD mechanisms, its eCM MUST set the docsDevSwOperStatus to other(5). The Set-top Device responds to an attempt to trigger a TFTP upgrade (initiated through SNMP or Configuration File) as follows:

- The Set-top Device MUST ignore DOCSIS SSD triggers through SNMP or Config File TLVs.
- The Set-top Device MUST remain capable of accepting new software through the non-DOCSIS firmware download mechanism.
- The Set-top Device MUST report the attempt to trigger a TFTP firmware upgrade by logging the appropriate event at the eCM (via an entry in the docsDevEvTable).
- The docsDevSwOperStatus MUST remain other(5).

¹⁰⁰ Section added per eDOCSIS-N-04.0154-2 by kb 7/18/04; Revised this section per eDOCSIS-N-06.0281-5 by GO on 10/4/06.

¹⁰¹ Section modified per eDOCSIS-N-05.0223-3 by kb 7/18/05.

If the Set-top Device does not implement DOCSIS SSD mechanisms, then all the download-related requirements as specified in [BPI+] do not apply. Additionally the eCM in this type of Set-top Device MUST support the BPI+ MIB docsBpi2CodeDownloadControl objects with the following constraints (other objects within docsBpi2CodeDownloadControl are as defined within the MIB):

- docsBpi2CodeDownloadStatusCode always reports other(7)
- docsBpi2CodeDownloadStatusString always returns the string "DOCSIS SSD not supported"

5.2.7.1.2 OSS Requirements for Firmware Downloads Initiated by the eSTB

During a firmware download for the Set-top Device which is initiated by the eSTB, the eCM MUST set its MIB objects as follows:

- docsDevSwServer to 0.0.0.0.
- docsDevSwFilename to the filename of the image the eSTB is downloading
- docsDevSwAdminStatus to ignoreProvisioningUpgrade(3)
- docsDevSwOperStatus to inProgress(1)
- docsDevSwCurrentVers to the current version of the eDOCSIS device code
- docsBpi2CodeDownloadStatusCode to other(7)
- docsBpi2CodeDownloadStatusString to the string "Set-top Device code file download initialized by the eSTB"

During the download of an image for the Set-top Device which is initiated by the eSTB, the eCM MUST ignore any change to the docsDevSwAdminStatus MIB object. Note that by setting docsDevSwAdminStatus to ignoreProvisioningUpgrade and by fixing this value, the eCM will ignore any firmware download triggers through the eCM configuration file while a firmware download initiated by the eSTB is taking place. Note also that setting docsDevSwAdminStatus to ignoreProvisioningUpgrade and by fixing this value, the eCM effectively ignores firmware download triggers through SNMP while a firmware download initiated by the eSTB is taking place.

After the download process finishes, the eCM MUST set its MIB objects as follows:

- docsDevSwServer to 0.0.0.0.
- docsDevSwFilename to the filename of the image that the eSTB intended to download.
- docsDevSwAdminStatus to ignoreProvisioningUpgrade(3) if the eDOCSIS device firmware download initiated by the eSTB succeeded, or to the value present before the download was initiated if the eDOCSIS device firmware download initiated by the eSTB failed.
- docsDevSwOperStatus to failed(4) if the eDOCSIS device firmware download initiated by the eSTB failed, or to other(5) if it succeeded.
- docsDevSwCurrentVers to the current version of the eDOCSIS device code.
- docsBpi2CodeDownloadStatusCode to codeFileVerified(5) if the eDOCSIS device could verify the firmware download, or codeFileRejected(6) if the eDOCSIS device could not verify the firmware download and therefore rejected it, or to other(7) in any other case.
- docsBpi2CodeDownloadStatusString to the string "Firmware Download initiated by the eSTB successful" if the eDOCSIS device firmware download initiated by the eSTB succeeded, or "Firmware Download initiated by the eSTB failed".

In the case where the CVC is distributed to the Set-top Device through the eSTB fails verification checks (e.g., those defined in OpenCable), the eCM MUST set its MIB objects as follows:

- docsBpi2CodeDownloadStatusCode to other(7).
- docsBpi2CodeDownloadStatusString to the string "Set-top Device CVC validation failure for CVC distributed through eSTB"

5.2.8 eSAFE configuration¹⁰²

It is within the scope of each eSAFE specification to define the configuration mechanisms for each type of eSAFE device. eDOCSIS provides two methods for the direct configuration of eSAFE features via the eCM. Either of these two methods may be used by an eSAFE, both may be used, or neither may be used, as defined in the relevant eSAFE specification. The two methods are:

1. eSAFE-MIB Configuration – The eSAFE-MIB can provide eCM MIB objects that can be used to configure a particular type of eSAFE (see Annex B). Such MIB objects can be set via the CM configuration file, or by direct SNMP access to the eCM.
2. eCM Config File Encapsulation – The eCM configuration file can contain eSAFE specific configuration parameters, the details of which are defined by the eSAFE specification. These configuration parameters are encapsulated in the eCM configuration file via the "eCM eSAFE Configuration File TLVs", and are passed to the eSAFE upon validation of the configuration file.

5.2.8.1 eCM Config File Encapsulation

If the eCM is embedded with one or more eSAFEs that utilize eCM Config File Encapsulation, the eCM MUST recognize the corresponding eCM eSAFE Configuration TLVs as listed in Table 5-13:

Table 5-13 - eCM eSAFE TLVs

Type	Length	Applies to eSAFE Type
201	n	ePS
202	n	eRouter
203..215		<reserved>
216	n	eMTA
217	n	eSTB
218		<reserved>
219	n	eTEA
220..231		<reserved>

Upon successful validation of the CM MIC, the eCM MUST pass the contents of the appropriate eCM eSAFE Configuration File TLVs to each eSAFE that supports eCM Config File Encapsulation.

The eCM MUST silently ignore eCM eSAFE Configuration File TLVs for eSAFEs that do not exist or that do not support eCM Config File Encapsulation.

¹⁰² Added this section per eDOCSIS-N-06.0279-3 by GO on 10/4/06.

The mechanism used to pass eCM eSAFE Configuration File TLVs to the eSAFE is vendor specific. It is in the scope of each eSAFE specification to define the encoding of configuration parameters within the corresponding eSAFE TLV and the rules in case the contents are longer than the 254-octet maximum length of each eCM configuration file TLV instance.

Annex A SLED MIB Definition^{103 104}

```

SLED-MIB DEFINITIONS ::= BEGIN
IMPORTS
    MODULE-IDENTITY,
        Integer32,
        OBJECT-TYPE          FROM SNMPv2-SMI
        TruthValue,
        TimeStamp,          FROM SNMPv2-TC
        OBJECT-GROUP,
        MODULE-COMPLIANCE FROM SNMPv2-CONF
    clabProjDocsis          FROM CLAB-DEF-MIB
    InterfaceIndex          FROM IF-MIB
;

sledMib MODULE-IDENTITY
    LAST-UPDATED      "200607280000Z" -- July 28, 2006
    ORGANIZATION      "CableLabs eDOCSIS Working Group"
    CONTACT-INFO
        "Postal:      Cable Television Laboratories, Inc
          858 Coal Creek Circle
          Louisville, CO 80027
          U.S.A.
        Phone:   +1 303-661-9100
        Fax:     +1 303-661-9199
        E-mail:  mibs@cablelabs.com"
    DESCRIPTION
        "This MIB module provides the management objects necessary
        to configure and invoke the Software Loopback Application
        for eDOCSIS (SLED) functionality."
    REVISION "200607280000Z" -- July 28, 2006
    DESCRIPTION
        "This revision is published as part of the CableLabs
        eDOCSIS Specification I09.

        Copyright 1999-2006 Cable Television Laboratories, Inc.
        All rights reserved."
    ::= { clabProjDocsis 13 }

-- Administrative assignments
sledNotifications          OBJECT IDENTIFIER ::= { sledMib 0 }
sledMibObjects             OBJECT IDENTIFIER ::= { sledMib 1 }
sledMibNotificationsObjects OBJECT IDENTIFIER ::= { sledMib 2 }
sledMibConformance         OBJECT IDENTIFIER ::= { sledMib 3 }

-- Object Groups
sledGlobal                 OBJECT IDENTIFIER ::= { sledMibObjects 1 }
sledLoopback               OBJECT IDENTIFIER ::= { sledMibObjects 2 }
sledPktGen                 OBJECT IDENTIFIER ::= { sledMibObjects 3 }

--
-- The following group describes the objects that apply to
-- both loopback and packet generator SLED functionality
--

sledGlobalEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "This object allows the SLED functionality to be
        enabled/disabled. This object may only be updated prior to
        device registration. If the device has completed

```

¹⁰³ Annex added per EDOCS-N-03088 11/17/03; revised per eDOCSIS-N-05.0212-2 by kb 3/14/05.

¹⁰⁴ Revisions made to Annex per eDOCSIS-N-07.0417-1, #1 by KN on 4/19/07.


```

        registration, any attempt to update the value of this
        object returns 'notWritable'. Prior to registration, if the
        value of this object is set to 'true', the SLED
        functionality is enabled and access to this MIB is allowed.
        Prior to registration, if the value of this object is set
        to 'false', the SLED functionality is disabled and any
        attempt to update other objects in this MIB returns
        'noAccess'."
DEFVAL { false }
 ::= { sledGlobal 1 }

--
-- The following group describes the loopback objects
--

sledLoopbackInterface OBJECT-TYPE
    SYNTAX      InterfaceIndex
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The index of the logical CPE interface (LCI) that the SLED
        loopback function is attached to. If the index does not
        correspond to a LCI supported by this device, 'wrongValue'
        is returned.
        Any attempt to set this object while sledLoopbackEnable is
        set to 'true' returns 'notWritable'."
    ::= { sledLoopback 1 }

sledLoopbackEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "Setting this object to 'true' enables the loopback
        function. Setting this object to 'false' disables the
        loopback function. When enabled, the eCM removes the
        Ethernet FCS/CRC32 from the original packets. All Ethernet
        packets received by the SLED from the LCI are then processed
        as follows:105

        1. If the received Ethernet packet is greater than 1472
           octets, the Ethernet packet is split into two fragments,
           the first consisting of the first 1472 octets of the
           Ethernet packet and the second containing the remaining
           octets, resulting in two payloads that are processed as
           described below. If the received Ethernet packet is less
           than or equal to 1472 octets, the entire packet will be
           processed as a single payload.
        2. For each payload generated in step 1, the payload is
           appended to the contents of sledLoopbackPktHdr.
        3. The mutable fields within sledLoopbackPktHdr MUST be
           recomputed. The mutable fields are IP Header Checksum, IP
           Total Length, UDP Checksum, and UDP Length.
        4. If the Ethernet packet was fragmented in step 1, the
           appropriate IP header fields (Flags and Fragment Offset)
           are updated to indicate IP fragmentation. These IP
           fragmentation header values will differ depending on
           if this is the first or second fragment being processed.
        5. The Ethernet FCS is computed and appended.
        6. The resulting Ethernet packet is transmitted to the
           LCI."
    DEFVAL { false }
    ::= { sledLoopback 2 }

sledLoopbackPktHdr OBJECT-TYPE

```

¹⁰⁵ Paragraph modified per eDOCSIS-N-04.0122-2 by kb 7/18/04.

```

SYNTAX      OCTET STRING (SIZE(42))
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "A properly formatted Ethernet(DIX)+IP+UDP headers for use
    in SLED loopback processing as described in
    sledLoopbackEnable. The object value contains mutable
    fields that are recomputed: the IP Header Checksum,
    IP Total Length, UDP Length, and UDP Checksum. Any attempt
    to set this object while sledLoopbackEnable is set to
    'true' returns 'notWritable'."
 ::= { sledLoopback 3 }
--
-- The following group describes the packet generation objects
--

sledPktGenInterface OBJECT-TYPE
    SYNTAX      InterfaceIndex
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The index of the logical CPE interface (LCI) that the SLED
        packet generation function is attached to. If the index
        does not correspond to a LCI supported by the device,
        'wrongValue' is returned. Any attempt to set this object
        while sledPktGenTrigger is set to 'start' returns
        'notWritable'."
    ::= { sledPktGen 1 }

sledPktGenPayload OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE(64..1518))
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The properly formatted Ethernet packet payload to be
        generated. Any attempt to set this object while
        sledPktGenTrigger is set to 'start' returns
        'notWritable'."
    ::= { sledPktGen 2 }

sledPktGenRate OBJECT-TYPE
    SYNTAX      Unsigned32106
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The packet rate (in packets per second) that the SLED is
        to transmit the packet specified in the sledPktGenPayload.
        Any attempt to set this object while sledPktGenTrigger is
        set to 'start' returns 'notWritable'."
    DEFVAL { 10 }
    ::= { sledPktGen 3 }

sledPktGenNumPkts OBJECT-TYPE
    SYNTAX      Unsigned32107
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "Number of packets to be generated at the rate specified by
        sledPktGenRate. Any attempt to set this object while
        sledPktGenTrigger has been set to 'start' will return
        'notWritable'."
    DEFVAL { 1 }
    ::= { sledPktGen 4 }

```

¹⁰⁶ Changed per eDOCSIS-N-04.0122-2 by kb 7/18/04.

¹⁰⁷ Changed per eDOCSIS-N-04.0122-2 by kb 7/18/04.

```

sledPktGenTrigger OBJECT-TYPE
    SYNTAX      INTEGER {
        start(1),
        stop(2)
    }
    MAX-ACCESS   read-write
    STATUS       current
    DESCRIPTION
        "This object controls the packet generation.  Setting this
        object to 'start' causes the packet generation to begin.
        Reading this object will return 'start' if a packet
        generation is in progress, otherwise it will return 'stop'.
        Setting this object to 'stop' while packet generation is in
        progress aborts the packet generation.  Setting this object
        to 'start' while packet generation is in progress,
        'wrongValue' is returned."
    DEFVAL { stop }
    ::= { sledPktGen 5 }

sledPktGenLastTrigger OBJECT-TYPE
    SYNTAX      TimeStamp
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Value of sysUptime when the packet generation was
        last triggered."
    ::= { sledPktGen 6 }

-- Conformance information *****

sledMibCompliances OBJECT IDENTIFIER ::= { sledMibConformance 1 }
sledMibGroups      OBJECT IDENTIFIER ::= { sledMibConformance 2 }

-- Compliance statements

sledMibCompliance MODULE-COMPLIANCE
    STATUS       current
    DESCRIPTION
        "The compliance statement for SLED."
    MODULE

-- unconditionally mandatory groups

    MANDATORY-GROUPS {
        sledMibBaseGroup
    }

    ::= { sledMibCompliances 1 }

sledMibBaseGroup OBJECT-GROUP
    OBJECTS {
        sledGlobalEnable,
        sledLoopbackInterface,
        sledLoopbackEnable,
        sledLoopbackPktHdr,
        sledPktGenInterface,
        sledPktGenPayload,
        sledPktGenRate,
        sledPktGenNumPkts,
        sledPktGenTrigger,
        sledPktGenLastTrigger
    }
    STATUS       current
    DESCRIPTION
        "Group of object in SLED MIB."
    ::= { sledMibGroups 1 }

```

END

Annex B eSAFE MIB Definition

An eCM in an eDOCSIS device implementing an embedded CableHome Portal Services logical element (ePS) or/and embedded PacketCable Multimedia Terminal Adapter logical element (eMTA) as an eSAFE MUST implement the following eSAFE MIB.^{108, 109}

```
ESAFE-MIB DEFINITIONS ::= BEGIN
IMPORTS
    MODULE-IDENTITY,
    Unsigned32,
    OBJECT-TYPE
        FROM SNMPv2-SMI --RFC 2578
    OBJECT-GROUP,
    MODULE-COMPLIANCE
        FROM SNMPv2-CONF -- RFC 2580

    TruthValue,
    DateAndTime,
    PhysAddress
        FROM SNMPv2-TC -- RFC 2579

    SnmpAdminString
        FROM SNMP-FRAMEWORK-MIB --RFC 3411

    ifIndex
        FROM IF-MIB --RFC 2863

    clabProjDocsis
        FROM CLAB-DEF-MIB
;

esafeMib MODULE-IDENTITY
    LAST-UPDATED "200702230000Z" -- February 23, 2007
    ORGANIZATION "Cable Television Laboratories, Inc."
    CONTACT-INFO
        "Postal: Cable Television Laboratories, Inc.
        858 Coal Creek Circle
        Louisville, CO 80027
        U.S.A.
        Phone: +1 303-661-9100
        Fax: +1 303-661-9199
        E-mail: mibs@cablelabs.com"
    DESCRIPTION
        "This MIB module provides the management objects necessary
        to configure functionality of eSAFE components of a device
        implementing an eDOCSIS compliant cable modem and one or
        more eSAFE elements.

        Copyright 1999-2007 Cable Television Laboratories, Inc.
        All rights reserved."
    REVISION "200702230000Z" -- February 23, 2007
    DESCRIPTION
        "This revision published as CM-SP-eDOCSIS-I11."

    REVISION "200607280000Z" -- July 28, 2006
    DESCRIPTION
        "This revision published as CM-SP-eDOCSIS-I09."
    ::= { clabProjDocsis 14 }
```

-- Administrative assignments

¹⁰⁸ Annex added by eDOCSIS-N-04.0152-5 by kb. Imports section modified per eDOCSIS-N-04.0172-6 by kb 11/1/04. Added esafeDevStatusTable, esafeDevStatusEntry, esafeDevServiceIntImpact, esafeDevServiceIntImpactInfo per eDOCSIS-N-04.0172-6 by kb 11/2/04. Revised esafePsCableHomeModeControl per eDOCSIS-N-04.0176-2 by kb 11/2/04. Revised esafePsCableHomeModeControl per dDOCSIS-N-04.0176-2 by kb 11/2/04.

¹⁰⁹ Revised ProvisioningStatusProgress, ProvisioningStatusFailureFound, and ProvisioningStatusFailureErrorText per eDOCSIS-N-05.0208-4 by kb 3/14/05.

Revised descriptions for several objects related to ProvisioningStatusFailure to include reference to eTEA.

Corrected text case in two instances per eDOCSIS-N-06.0336-1 by kb 2/1/07; eRouter objects added per eDOCSIS-N-06.0343-2 by kb 2/2/07. Revisions to Annex B made per eDOCSIS-N-07.0417-1 by KN on 4/19/07.

```

-- esafeNotifications OBJECT IDENTIFIER ::= { esafeMib 0 }
esafeMibObjects OBJECT IDENTIFIER ::= { esafeMib 1 }
esafeBase OBJECT IDENTIFIER ::= { esafeMibObjects 1 }
esafePsMibObjects OBJECT IDENTIFIER ::= { esafeMibObjects 2 }
esafeMtaMibObjects OBJECT IDENTIFIER ::= { esafeMibObjects 3 }
esafeStbMibObjects OBJECT IDENTIFIER ::= { esafeMibObjects 4 }
esafeErouterMibObjects OBJECT IDENTIFIER ::= { esafeMibObjects 5 }

-- Object Groups

--
-- eSAFE Base Objects
--

esafeProvisioningStatusTable OBJECT-TYPE
    SYNTAX SEQUENCE OF EsafeProvisioningStatusEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains the current provisioning
        status of each implemented eSAFE, and information
        about the last failure or exception condition in
        the eSAFE provisioning process, if applicable."
    ::= { esafeBase 1 }

esafeProvisioningStatusEntry OBJECT-TYPE
    SYNTAX EsafeProvisioningStatusEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "An entry in this table is created for
        each eSAFE implemented in the eDOCSIS
        compliant device."
    INDEX { ifIndex }
    ::= { esafeProvisioningStatusTable 1 }

EsafeProvisioningStatusEntry ::= SEQUENCE
{
    esafeProvisioningStatusProgress INTEGER,
    esafeProvisioningStatusFailureFound TruthValue,
    esafeProvisioningStatusFailureFlow SnmpAdminString,
    esafeProvisioningStatusFailureEventID Unsigned32,
    esafeProvisioningStatusFailureErrorText SnmpAdminString,
    esafeProvisioningStatusLastUpdate DateAndTime
}

esafeProvisioningStatusProgress OBJECT-TYPE
    SYNTAX INTEGER {
        notInitiated(1),
        inProgress(2),
        finished(3)
    }
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The current state of the eSAFE provisioning process.

        notInitiated(1) indicates that the eSAFE has not yet
        begun its provisioning process.

        inProgress(2) indicates that the eSAFE is in the process
        of provisioning.

        finished(3) indicates that the eSAFE completed
        its provisioning process. Provisioning success
        or failure information is provided by other

```

```

        objects, including
        esafeProvisioningStatusFailureFound and
        cabhPsDevProvState."
 ::= { esafeProvisioningStatusEntry 1 }

esafeProvisioningStatusFailureFound OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "true(1) indicates that the eSAFE encountered
        an error condition during the provisioning
        process. An eSAFE could start a looping process
        from a previous flow step after a failure,
        therefore this value is retained until the
        flow step that initially failed eventually
        passes or is updated with another error
        condition.

        The eSAFE device needs to reflect in the value of
        'esafePsProvisioningStatusFailureFound' any recognized
        errors even if it is still in the process of
        provisioning, i.e., when
        esafeProvisioningStatusProgress has a value of
        inProgress(2)."
```

REFERENCE

"PacketCable Provisioning specification,
Provisioning Overview section; CableHome
specification, Provisioning Processes
section, BSoD TDM Emulation Interface Specification,
Provisioning section."

```

 ::= { esafeProvisioningStatusEntry 2 }

esafeProvisioningStatusFailureFlow OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "If esafeProvisioningStatusFailureFound
        is true(1) this object contains the
        label for the provisioning flow step
        in which the error condition was
        encountered, otherwise an empty value
        is reported.

        The value of this object corresponds to
        the provisioning sequence 'Flow Step'
        designator for the associated eSAFE, as
        defined in the eSAFE specification. For
        example, an ePS will report a value like
        CHPSWMD-1, an eMTA will report a value
        such as MTA-1, and a TEA will report a value
        such as eTEA-1."
```

REFERENCE

"PacketCable Provisioning specification,
Provisioning Overview section; CableHome
specification, Provisioning Processes
section; BSoD TDM Emulation Interface Specification,
provisioning section."

```

 ::= { esafeProvisioningStatusEntry 3 }

esafeProvisioningStatusFailureEventID OBJECT-TYPE
    SYNTAX      Unsigned32 (0..4294967295)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "If esafeProvisioningStatusFailureFound
```

is true(1) this object contains the eSAFE log error Event Identifier defined in the eSAFE specification, otherwise it returns a value '0'. For an eMTA type eSAFE, this object reports the PacketCable EventID value from the Provisioning Events table, e.g., 65535. For an ePS type eSAFE, this object reports the EventID value from the Defined Events for CableHome table, e.g., 68000100. For an eTEA type eSAFE, this object reports the Event ID value from the 'Event ID' column of the DOCSIS Events Extensions table for BSoD TDM Emulation Interface Specification, e.g., 8000100."

REFERENCE

"PacketCable Provisioning specification, Appendix I Provisioning Events; CableHome specification, Appendix II Format and Content for Event, SYSLOG, and SNMP Trap; BSoD TDM Emulation Interface Specification, Annex A Event, SYSLOG, and SNMP Trap Extensions."

::={ esafeProvisioningStatusEntry 4 }

esafeProvisioningStatusFailureErrorText OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"If esafeProvisioningStatusFailureFound is true(1) this object contains the eSAFE log error messages based on the eSAFE specification, otherwise it returns an empty value. For an eMTA type eSAFE, this object reports the value from the 'Comments' column of the Provisioning Events table, e.g., 'The DNS Response from the DNS server did not resolve the TFTP FQDN.' For an ePS type eSAFE this object reports the value from the 'Event Text' column of the Defined Events for CableHome table, e.g., 'DHCP Failed - Discover sent, no offer received. For an eTEA type eSAFE, this object reports the value from the 'Event Message' column of the DOCSIS Events Extensions table for BSoD TDM Emulation Interface Specification, e.g., 'TFTP config file download error (eTEA-6).'"

REFERENCE

"PacketCable Provisioning specification, PacketCable Management Event Mechanism specification; CableHome specification, Appendix II Format and Content for Event, SYSLOG, and SNMP Trap; BSoD TDM Emulation Interface Specification, DOCSIS Events Extensions Annex for Event, SYSLOG, and SNMP Trap Extensions."

::={ esafeProvisioningStatusEntry 5 }

esafeProvisioningStatusLastUpdate OBJECT-TYPE

SYNTAX DateAndTime

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The value of the eCM docsDevDateTime when this row entry was last updated."

::={ esafeProvisioningStatusEntry 6 }

esafeDevStatusTable OBJECT-TYPE


```

SYNTAX      SEQUENCE OF EsafeDevStatusEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains entries that provide the SNMP manager
    with status information pertaining to each implemented
    eSAFE device. While this table MUST be implemented by all
    eDOCSIS devices, the support for reporting such information
    and the status conditions supported will be determined by
    the corresponding eSAFE specifications. It is highly
    recommended that the eSAFE MIBs themselves have objects
    to specify more detailed information."
 ::= { esafeBase 2 }

```

esafeDevStatusEntry OBJECT-TYPE

```

SYNTAX      EsafeDevStatusEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "An entry in this table MUST be created for each eSAFE
    device behind the eCM. The index needs to be the
    corresponding index in the ifTable for the associated
    eSAFE device."
INDEX { ifIndex }
 ::= { esafeDevStatusTable 1 }

```

esafeDevStatusEntry ::=SEQUENCE

```

{
    esafeDevServiceIntImpact INTEGER,
    esafeDevServiceIntImpactInfo SnmpAdminString
}

```

esafeDevServiceIntImpact OBJECT-TYPE

```

SYNTAX      INTEGER {
                significant(1),
                none(2),
                unsupported(3)
            }
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The value of this MIB object indicates the service
    interruption impact assessment of the corresponding eSAFE
    device as determined by the current status of the eSAFE
    device, in accordance with the directives provided in the
    eSAFE specification.

    If esafeDevServiceIntImpact is set to significant (1), it
    indicates that the corresponding eSAFE device (as per the
    eSAFE specification) identifies a significant impact on the
    active services at the given point in time. This impact
    level is highly recommended for critical or real-time
    services, though the impact assessment is left to the
    directives provided by the associated eSAFE specification.

    If esafeDevServiceIntImpact is set to none (2), it
    indicates that the corresponding eSAFE device (as per the
    eSAFE specification) identifies no significant impact on
    the services offered at the given point in time.

    If esafeDevServiceIntImpact is unsupported(3), it indicates
    that the corresponding eSAFE device has no known interfaces
    to support this feature or the eSAFE specification does not
    recommend this feature.

    If the eSAFE specification specifies the use of this
    mechanism then it MUST define definitive states for the

```

impacts (significant or none) and the value of unsupported(3) MUST not be used by the eDOCSIS device for that eSAFE interface.

However, if the corresponding eSAFE specification does not provide any directives then the value MUST be set to unsupported(3).

If there exists multiple services being offered by an eSAFE device (Either multiple services or multiple instances of the same service), this MIB MUST indicate the highest possible impact and other impact information SHOULD be populated in the associated esafeDevServiceIntImpactInfo table."

```
::={ esafeDevStatusEntry 1 }
```

esafeDevServiceIntImpactInfo OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object provides more information to the SNMP Managers regarding the condition reported in esafeDevServiceIntImpact. The eSAFE device vendor could use this to fill in specific vendor strings or values that could add value or provide more information related to the status.

Examples:

For eMTA devices:

Lines 1 and 3 have active connections, Line 2 is not provisioned.

<Value of the corresponding MIB object in the eMTA MIBs, if applicable>

For other eSAFE devices:

Critical video streaming in progress, please wait for 5.30 minutes

<Value of the corresponding MIB object in the eSAFE MIBs, if applicable>.

The device MUST report 'No Additional Information' in case the associated eSAFE vendor cannot obtain information from the eSAFE device."

```
::={ esafeDevStatusEntry 2 }
```

--

-- Objects that apply to an eCM with an ePS type eSAFE.

--

esafePsCableHomeModeControl OBJECT-TYPE

SYNTAX INTEGER {
disabledMode(1),
provSystem(2),
dormantCHMode(3)
}

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object provides control over the mode of operation of the CableHome ePS eSAFE element of the eDOCSIS compliant device.

When this object is set to disabledMode(1), the ePS eSAFE element is instructed to switch to CableHome Disabled Mode operation.

When this object is set to provSystem(2), the ePS eSAFE element restarts its provisioning process.

When this object is set to dormantCHMode(3), the ePS eSAFE element is instructed to switch to CableHome Dormant Mode operation. In this mode the ePS restarts its provisioning process omitting CableHome-specific DHCP Options 60 and 43 in the DHCP DISCOVER and DHCP REQUEST messages, acquires an IP address lease from the cable operator's DHCP server, and operates in unmanaged Dormant CableHome Mode regardless of the values of the file and siaddr fields or of the values of DHCP options that might otherwise configure the ePS to operate in DHCP Provisioning Mode or in SNMP Provisioning Mode.

The value of this object MUST persist across cable modem resets."

REFERENCE

"CableHome specifications, CableHome Operational Modes section."

DEFVAL { dormantCHMode }
::= { esafePsMibObjects 1 }

esafePsCableHomeModeStatus OBJECT-TYPE

SYNTAX INTEGER {
disabledMode(1),
dormantCHMode(2),
cableHomeMode(3)
}

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object provides visibility to the current mode of operation of the CableHome ePS eSAFE element of the eDOCSIS compliant device.

If the value of this object is disabledMode(1), the ePS eSAFE element is currently operating in CableHome Disabled Mode.

If the value of this object is dormantCHMode(2), the ePS is currently operating in Dormant CableHome Mode.

If the value of this object is cableHomeMode(3), the ePS is currently operating in CableHome mode."

REFERENCE

"CableHome specification, CableHome Operational Models section."

::= { esafePsMibObjects 2 }

--

-- Objects that apply to an eCM with an eRouter type eSAFE.

--

esafeErouterAdminMode OBJECT-TYPE

SYNTAX INTEGER {
disabled(1),
ipv4Only(2),
ipv6Only(3),
ipv4AndIpv6(4)
}

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object provides visibility to the mode of operation to which the DOCSIS eRouter eSAFE element

was set via TLV in the cable modem configuration file.

If the value of this object is disabled(1), the eRouter was configured via TLV in the cable modem configuration file to not initialize as described in the eRouter Initialization section of the CableLabs IPv4 and IPv6 eRouter Specification.

If the value of this object is ipv4Only(2), the eRouter was configured via TLV in the cable modem configuration file to operate with an IPv4 network address and with the IPv4 stack operational and to operate without an IPv6 network address and to not run an IPv6 protocol stack.

If the value of this object is ipv6Only(3), the eRouter was configured via TLV in the cable modem configuration file to operate with an IPv6 network address and with the IPv6 stack operational and to operate without an IPv4 network address and to not run an IPv4 protocol stack.

If the value of this object is ipv4AndIpv6(4), the eRouter was configured via TLV in the cable modem configuration file to operate with an IPv4 network address and an IPv6 network address and to run both IPv4 and IPv6 protocol stacks."

REFERENCE

"DOCSIS IPv4 and IPv6 eRouter Specification,
CM-SP-eRouter-I02-070223."

::= { esafeErouterMibObjects 1 }

esafeErouterOperMode OBJECT-TYPE

```
SYNTAX      INTEGER {
    disabled(1),
    ipv4OnlyFwding(2),
    ipv6OnlyFwding(3),
    ipv4AndIpv6Fwding(4),
    noIpv4AndNoIpv6Fwding(5)
}
```

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object provides visibility to the current mode of operation of the DOCSIS eRouter eSAFE element of the eDOCSIS compliant device.

If the value of this object is disabled(1), the eRouter eSAFE element has been administratively Disabled. The eDOCSIS device will bridge traffic according to the configuration of the DOCSIS embedded cable modem (eCM)

If the value of this object is ipv4OnlyFwding(2), the eRouter eSAFE element is currently operating with the IPv4 protocol stack operational, is forwarding IPv4 traffic, and is not running an IPv6 protocol stack and not forwarding IPv6 traffic.

If the value of this object is ipv6OnlyFwding(3), the eRouter eSAFE element is currently operating with the IPv6 protocol stack operational, is forwarding IPv6 traffic, and is not running an IPv4 protocol stack and not forwarding IPv4 traffic.

If the value of this object is ipv4AndIpv6Fwding(4), the eRouter eSAFE element is currently operating

with both the IPv4 protocol stack and IPv6 protocol stack operational, and is forwarding IPv4 and IPv6 traffic.

If the value of this object is noIpv4AndNoIpv6Fwding(5), the eRouter is currently operating with neither the IPv4 nor IPv6 protocol stack running. The eRouter is unable to pass traffic between the Operator-Facing Interface and the Customer-Facing Interface. "

REFERENCE

"DOCSIS IPv4 and IPv6 eRouter Specification,
CM-SP-eRouter-I02-070223."

::= { esafeErouterMibObjects 2 }

esafeErouterPhysAddress OBJECT-TYPE

SYNTAX PhysAddress

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The physical address of the operator-facing interface of the DOCSIS eRouter eSAFE element."

::= { esafeErouterMibObjects 3 }

-- Conformance information

esafeMibConformance OBJECT IDENTIFIER ::= { esafeMib 2 }

esafeMibCompliances OBJECT IDENTIFIER ::= { esafeMibConformance 1 }

esafeMibGroups OBJECT IDENTIFIER ::= { esafeMibConformance 2 }

-- Compliance statements

esafeMibBasicCompliance MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"The compliance statement for eSAFE MIB objects."

MODULE -- eSAFE-MIB

-- unconditionally mandatory groups

```
MANDATORY-GROUPS {
    esafeBaseGroup
}
```

-- conditionally mandatory groups

GROUP esafePsMibGroup

DESCRIPTION

"This group is implemented only by eDOCSIS devices that implement an embedded Portal Services logical element (ePS) compliant with CableLabs CableHome specifications."

GROUP esafeErouterMibGroup

DESCRIPTION

"This group is implemented only by eDOCSIS devices that implement a DOCSIS embedded router (eRouter) element compliant with CableLabs DOCSIS eRouter specifications."

::= { esafeMibCompliances 1 }

-- eSAFE Base Group Declarations

esafeBaseGroup OBJECT-GROUP

```
OBJECTS {
    esafeProvisioningStatusProgress,
```

```

        esafeProvisioningStatusFailureFound,
        esafeProvisioningStatusFailureFlow,
        esafeProvisioningStatusFailureEventID,
        esafeProvisioningStatusFailureErrorText,
        esafeProvisioningStatusLastUpdate,
        esafeDevServiceIntImpact,
        esafeDevServiceIntImpactInfo
    }
    STATUS          current
    DESCRIPTION
        "Group of eSAFE Base objects in the eSAFE MIB."
    ::= { esafeMibGroups 1 }

-- PS MIB Group

esafePsMibGroup OBJECT-GROUP
    OBJECTS {
        esafePsCableHomeModeControl,
        esafePsCableHomeModeStatus
    }
    STATUS          current
    DESCRIPTION
        "Group of embedded PS-specific objects
        in the eSAFE MIB."
    ::= { esafeMibGroups 2 }

-- eRouter MIB Group

esafeErouterMibGroup OBJECT-GROUP
    OBJECTS {
        esafeErouterAdminMode,
        esafeErouterOperMode,
        esafeErouterPhysAddress
    }
    STATUS          current
    DESCRIPTION
        "Group of embedded Router-specific objects
        in the eSAFE MIB."
    ::= { esafeMibGroups 3 }

END

```

Annex C Format and Content for eCM/eSTB Event, SYSLOG, and SNMP Trap Extensions

To facilitate device provisioning and fault management, the eCM of a Set-top Device MUST support the DOCSIS Event extensions defined in this section.

This section is an extension of Annex D Format and Content for Event, SYSLOG, and SNMP Trap (normative) of [OSSI 2.0].

Table C-1 - eDOCSIS Events Extensions

SET-TOP DEVICE SOFTWARE UPGRADE							
Process	Sub-Process	CM Priority	Event Message	Message Notes and Details	Error Code Set	Event ID	Trap Name
SW Upgrade	SW Upgrade General Failure	Notice	DOCSIS SSD not supported		H01.1	72000101	
SW Upgrade	Verification of CVC	Error	Set-top Device CVC validation failure for CVC distributed through the eSTB		H01.2	72000102	docsDevCmSwUpgradeCVCFail Trap
SW Upgrade	SW Upgrade Init	Notice	Set-top Device code file download initialized through the eSTB		H01.3	72000103	docsDevCmSwUpgradeInitTrap
SW Upgrade	SW Upgrade General Failure	Error	Set-top Device code file download through the eSTB failed		H01.4	72000104	docsDevCmSwUpgradeFailTrap
SW Upgrade	SW Upgrade Success	Notice	Set-top Device code file success fully downloaded through the eSTB		H01.5	72000105	docsDevCmSwUpgradeSuccess Trap

Appendix I Acknowledgements

The inter-disciplinary nature of this specification involves contributions from many individuals. On behalf of CableLabs and its participating member companies, I would like to extend our sincere appreciation to all those have contributed to the development of this specification. Special thanks are given to:

Ralph Brown	CableLabs
Eduardo Cardona	CableLabs
Kevin Luehrs	CableLabs
Greg White	CableLabs
Margo Dolas	Broadcom
Gordon Li	Conexant
Sridhar Sharma	Imedia
Greg Nakanishi	Motorola
Mariano Schain	Texas Instruments
Nancy Davoust	YAS
Doug Jones	YAS

Special thanks are also given to Liz Weeks of YAS for her skillful editing work making the aggressive release deadlines possible.

Appendix II Revision History

II.1 Engineering Change Notices incorporated in SP-eDOCSIS I02-031117.

ECN	Date Ratified	Summary
EDOCS-N-03084	8/20/03	Incorporate DHCP Option 43 for eDOCSIS.
EDOCS-N-03099	10/29/03	Corrections and Clarifications; alignment of rearranged text with J.eCM submission.
EDOCS-N-03088	10/29/03	Incorporate Software Loopback for eDOCSIS (SLED).

II.2 Engineering Change Notices incorporated in CM-SP-eDOCSIS I03-040804.

ECN	Date Ratified	Summary
eDOCSIS-N-04.0122-2	2/11/04	eDOCSIS SLED clarifications.
eDOCSIS-N-04.0123-2	2/11/04	eDOCSIS DHCP Option 43 clarifications.
eDOCSIS-N-04.0134-2	3/17/04	eDOCSIS DHCP Option 43 suboption 1 clarifications.
eDOCSIS-N-04.0138-1	4/7/04	Reserved DHCP 43 suboptions for eSAFEs.
eDOCSIS-N-04.0150-2	6/30/04	eDOCSIS clarification on the effect of NACO state on eSAFE traffic.
eDOCSIS-N-04.0151-3	6/30/04	Adding eSTB as a new eDOCSIS eSAFE.
eDOCSIS-N-04.0152-5	7/7/04	eSAFE MIB definition for eDOCSIS.
eDOCSIS-N-04.0153-2	6/30/04	eDOCSIS ifIndex filter rules for interfaces to eSAFEs.
eDOCSIS-N-04.0154-2	6/30/04	Modify eDOCSIS firmware download requirements to account for eSTB.
eDOCSIS-N-04.0158-2	7/7/04	Additional RFC 1493 requirements for eDOCSIS devices.
eDOCSIS-N-04.0160-1	7/28/04	Miscellaneous editorial and typo corrections.
eDOCSIS-N-04.0161-1	7/28/04	Remove reference to non-existent eSAFE MIB object.

II.3 Engineering Change Notices incorporated in CM-SP-eDOCSIS I04-041124.

ECN	Date Ratified	Summary
eDOCSIS-N-04.0169-1	9/1/04	Correct eCM DHCP sub-option 43.1 entry in Table 5-8.
eDOCSIS-N-04.0172-6	10/6/04	Enhancements to eDOCSIS MIB for device status, specifically related to safe reboots.
eDOCSIS-N-04.0176-2	10/27/04	Add dormant mode option to eSAFE MIB object esafePsCableHomeModeControl.
eDOCSIS-N-04.0182-2	10/27/04	Clarification of MaxCPE count for DSG tunnel MAC addresses.

II.4 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I05-050408.

ECN	Date Ratified	Summary
eDOCSIS-N-05.0208-4	2/16/05	esafeProvisioningStatusProgress description change.
eDOCSIS-N-05.0210-2	2/23/05	Software download for CMs with eSTBs.
eDOCSIS-N-05.0212-2	3/9/05	Discrepancy between the CLAB-DEF-MIB and the SLED-MIB.

II.5 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I06-050812.

ECN	Date Ratified	Summary
eDOCSIS-N-05.0223-3	7/14/05	SW Download for Non-OC eDOCSIS Device

II.6 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I07-051209.

ECN	Date Ratified	Summary
eDOCSIS-N-05.0260-2	11/9/05	Update of eDOCSIS for changes in OC downloading.

II.7 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I08-060407.

ECN	Date Ratified	Summary
eDOCSIS-N-06.0268-2	3/22/06	CableCARD MAC Address Heading

II.8 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I09-060728.

ECN	Date Ratified	Summary
eDOCSIS-N-06.0269-2	4/12/06	Incorporation of conditionally mandatory Battery Backup UPS MIBs
eDOCSIS-N-06.0271-2	5/24/06	Updates to eDOCSIS to define requirements for new eTEA eSAFE

II.9 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I10-061222.

ECN	Date Ratified	Summary
eDOCSIS-N-06.0279-3	8/30/06	Addition of eCM eSAFE Configuration File TLVs processing by the eCM
eDOCSIS-N-06.0281-5	8/30/06	Revisions to eSTB SW download section
eDOCSIS-N-06.0283-3	8/30/06	Modification to eDOCSIS eSTB to enhance protocol stack to include Socket Flow
eDOCSIS-N-06.0290-2	9/20/06	Number of eCM CMCI's Clarification

II.10 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I11-070223.

ECN	Date Accepted	Summary
eDOCSIS-N-06.0336-1	12/13/06	eSAFE MIB compiler errors and warnings
eDOCSIS-N-06.0343-2	1/3/07	Updates to define requirements for eRouter eSAFE
eDOCSIS-N-06.0355-2	1/17/07	eSTB Security Element Suboption

II.11 Engineering Change Notices incorporated in CM-SP-eDOCSIS-I12-070518.

ECN	Date Accepted	Summary
eDOCSIS-N-07.0394-2	3/21/07	SysDescr Requirements for eDOCSIS device
eDOCSIS-N-07.0417-1	4/18/07	Editorial corrections to eSAFE MIB
